



MJ-GERÜST
Scaffolding Systems

Stark gerüstet.

valid
from 15.06.2018

Facade Scaffolding UNI-CONNECT Prices

English



Contents

| | |
|---|----------|
| Contents Mission statement Benefits of the system | 2 - 3 |
| Benefits of the system | 4 - 5 |
| Assembly frames | 6 |
| Assembly frames Weather protection | 7 |
| Decks | 8 |
| Decks Scaffold access -inside- | 9 |
| Scaffold access -outside- Ledger | 10 |
| Scaffold access -outside- | 11 |
| Gap covers | 12 |
| Couplers Bracing | 13 |
| Toe boards | 14 |
| Side guards | 15 |
| Upper scaffold guard rails | 16 |
| Roof guard scaffold | 17 |
| Brackets | 18 - 19 |
| Brackets Diagonales | 20 |
| Scaffold expansion Deck fastening Roof guard | 21 |
| Base jacks Couplers | 22 |
| Scaffold pallets | 23 |
| Anchoring | 24 |
| Mobile towers Castors | 25 |
| Protective equipment | 26 - 29 |
| Scaffold examples | 30 - 31 |
| Notes | 32 - 34 |
| Fax order form | 35 |
| MJ-Gerüst external warehouses in Germany | Backpage |

Prices marked with an asterisk are net prices.

Discounts / deductions cannot be granted for these prices.

All prices exclude VAT applicable at the time of shipment. All dimensions and weights are non-binding approximate values. Technical data is subject to change without prior notice. Prices are charged as applicable on the day of shipment. Sale is subject exclusively to our sales terms and delivery conditions. In brief: Place of business and jurisdiction is Plettenberg. Extended reservation of property rights until full payment of all our outstanding accounts receivables. Our prices are ex works.




MJ UNI-CONNECT: fast - safe - extensive

The wedge retainer, along with the U-shaped upper cross beam of the vertical frame, in which the scaffolding decks are easily mounted, make the MJ UNI-CONNECT system easy to use, quick and easy to dismantle. These are also the key safety features of the system. Thus the wedge, as a connection element between vertical frames, diagonals and guard rails, ensures a safe and a friction locked connection of the components.


The decks are placed in the U-profiles with two or three claws, depending on the width, and ensure that dead load and traffic loads are safely discharged; this reinforces the whole system and results in a firm connection between the individual scaffold bays.

MJ UNI-CONNECT can also be used as a guard and roof guard scaffold and the use of a roof guard is included in the standard scaffolding design.


Due to its extensive and functionally aligned accessories, the system is able to achieve a degree of flexibility that also enables scaffolding for difficult tasks. MJ UNI-CONNECT is available in both steel and aluminum models.




Efficient
due to optimised ease of assembly



Cost-effective
due to long service life and excellent intrinsic value



Flexible
due to innumerable bay lengths and widths



Versatile
due to an extensive range of accessories



Safe
through technical approval*

MJ-Gerüst – top-quality scaffolding "Made in Plettenberg"

MJ-Gerüst GmbH has its head office in Plettenberg in the German province of Sauerland and is part of a strong group of companies that looks back on 50 years of company history. The core competence of the family business lies in the production and worldwide sale of high-quality scaffolding systems made of steel or aluminum that offer virtually infinite possibilities in terms of modern system scaffolding.

Reasons for you to become our partner:

- We manufacture our products in Germany.
- We are DIN EN 9001, 14001 and 50001 certified.
- We ensure the very highest product quality with dynamic quality management.
- Due to our extensive storage capacities and short decision-making paths, we ensure short-term material availability.
- We support you with your projects as early as the planning phase.
- We ensure global on-time shipment.



* Further details, also on joint use with other systems, can be found in the building approvals Z-8.1-872, Z-8.1-922 and Z-8.1-935.



MJ-GERÜST
Scaffolding Systems





Set up the base jacks, attach assembly frame and connect to guard rails.



Mount vertical diagonal brace, install horizontal brace (only in the diagonal bay).




Mount deck.



Use spirit level to align scaffold bay perpendicularly to guard rail and assembly frame.



Mount inside access deck.

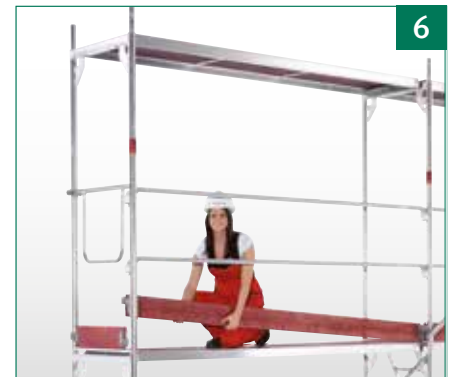

Assemble assembly frame and decks of the next lift, then mount diagonals, guard rails and toe boards.

Essential benefits of the system UNI-CONNECT at a glance:

- Easy to use, thus short assembly times
- **High safety features:** Safe connections with special clamping mechanism. Distribution of inherent and moving loads in the decks. High degree of reinforcement.
- Few scaffold parts, but more versatile areas of application
- Decks made of timber, steel and aluminum

Various brackets enable flexible expansion options, even if the building has protrusions, bay windows, balconies, etc. All brackets are equipped with a welded on half coupler and are mounted through the square holes in the edge-plates of the vertical frame.

Scaffold expansions with brackets of 0.73 m and 1.09 m are executed using a transverse diagonal. This directs the loads to the frames beneath. The 0.36 m brackets are used for the inside and outside expansion of the scaffold.



ASSEMBLY FRAME, STEEL

Steel tube Ø 48.3 x 2.7 mm
hot dip galvanized, U-profile
for attaching decks.
The assembly frame UC 100 meets the
requirements of width class A/F 09 and is
designed for highly loaded scaffoldings up to
load class 6.

PU: 22 pieces (height 2.00 + 1.50 m)
44 pieces (height 1.00 m)
66 pieces (height 0.66 m)



UC 70


UC 100

1-board

* Wall thickness 3.2 mm




| Height m | Width m | Weight approx. kg | Article No. | Price Euro |
|-------------------------------|------------|----------------------|----------------|---------------|
| 2.00 | 0.73 | 17.80 | 000853 | 63.10 |
| 2.00* | 0.73 | 20.70 | 002800 | 72.90 |
| 1.50 | 0.73 | 16.40 | 000856 | 62.60 |
| 1.00 | 0.73 | 12.80 | 000855 | 61.00 |
| 0.66 | 0.73 | 10.40 | 000446 | 53.50 |
| 2.00 | 1.09 | 23.40 | 000858 | 79.40 |
| 1.50 | 1.09 | 20.20 | 000861 | 78.80 |
| 1.00 | 1.09 | 15.90 | 000859 | 72.10 |
| 0.66 | 1.09 | 13.40 | 000456 | 67.50 |
| 2.00 | 0.36 | 18.30 | 000876 | 71.20 |
| 1.00 | 0.36 | 10.60 | 000604 | 68.30 |
| 0.66 | 0.36 | 8.60 | 000605 | 66.30 |
| INDIVIDUAL NEEDLE EMBOSSING - | | | | 3.90 |

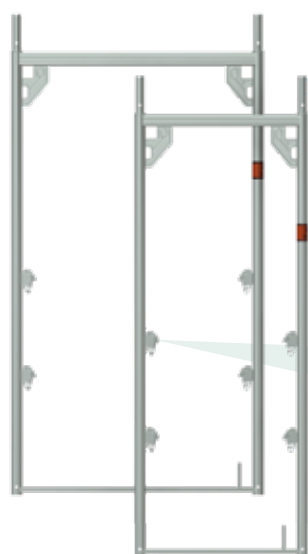

ASSEMBLY FRAME, STEEL

Same as above but with 4 guard rail wedge
housings for inside and outside guard rails.
PU: 22 pieces

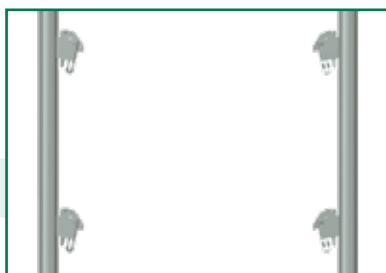

| | | | | |
|------|------|-------|--------|-------|
| 2.00 | 0.73 | 17.90 | 008095 | 80.70 |
| 2.00 | 1.09 | 23.50 | 006817 | 94.50 |



ASSEMBLY FRAME, ALUMINUM

Tube Ø 48.3 x 4.0 mm.
U-profile for attaching decks low inherent weight
with high strength reinforcement.
PU: 22 pieces (height 2.00 m)
44 pieces (height 1.00 m)
66 pieces (height 0.66 m)




| | | | | |
|------|------|------|--------|-------|
| 2.00 | 0.73 | 8.60 | 000863 | 96.70 |
| 1.50 | 0.73 | 7.70 | 002818 | 92.10 |
| 1.00 | 0.73 | 5.40 | 000864 | 77.20 |
| 0.66 | 0.73 | 4.20 | 000459 | 65.90 |




ASSEMBLY FRAME FOR ROOF OVERHANG
Steel tube Ø 48.3 mm, hot dip galvanized, for retrofitting roof overhangs and building protrusions. Up to 4 further scaffold levels are possible.
PU: 22 pieces


| Height / Length m | Width m | Weight approx. kg | Article No. | Price Euro |
|-------------------|---------|-------------------|-------------|------------|
| 2.00 | 0.73 | 22.00 | 000862 | 127.60 |
| 2.00 | 1.09 | 24.00 | 000452 | 142.00 |

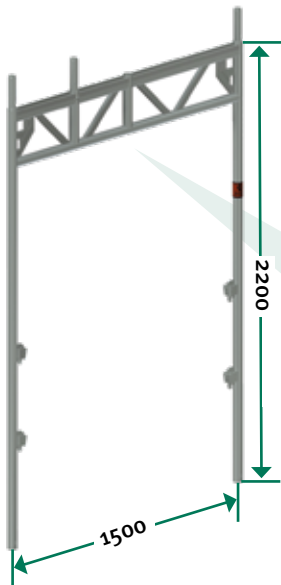

WALK-THROUGH FRAME
Steel tube Ø 48.3 mm, hot dip galvanized, passageway for pedestrians and pedestrian protection, tube connector for frame widths 0.73 and 1.09 m which can be mounted in different ways. The bracing in longitudinal direction is performed by system diagonals in connection with horizontal braces.
PU: 20 pieces



| | | | | |
|------|------|-------|--------|--------|
| 2.20 | 1.50 | 31.50 | 003152 | 179.70 |
|------|------|-------|--------|--------|

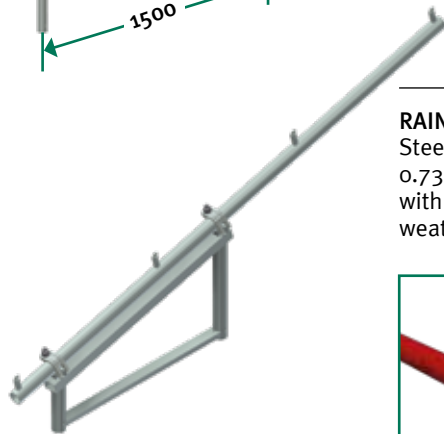

RAIN CANOPY BRACKET, TWO-PIECE SET*
Steel, hot dip galvanized, for use with frame width 0.73 m in the top scaffold platform. In conjunction with guard rails and tarps, this component provides weather protection.

| | | | | |
|---|------|-------|--------|--------|
| – | 0.73 | 13.50 | 008130 | 145.80 |
|---|------|-------|--------|--------|



GUARD RAILS FOR SWIVEL PIN CONNECTION*



| | | | | |
|------|---|------|--------|-------|
| 0.73 | – | 1.50 | 008165 | 14.40 |
| 1.09 | – | 2.10 | 008166 | 14.90 |
| 1.57 | – | 2.90 | 008167 | 15.90 |
| 2.07 | – | 3.80 | 008168 | 17.30 |
| 2.57 | – | 4.50 | 003585 | 18.50 |
| 3.07 | – | 5.60 | 002696 | 19.80 |


STEEL DECK

Extremely robust, for the toughest operations completely hot dip galvanized. The decks correspond to the requirements of DIN EN 12811 can be used in guard and roof guard scaffolds as per DIN 4420. Safe, non-slip surface with pronounced hole profiling, good stackability due to the guide grooves at the edges, can be used up to load class 6 depending on the length.
PU: 60/80 pieces



| Load class | Length m | Width m | Weight approx. kg | Article No. | Price Euro |
|------------|----------|---------|-------------------|-------------|------------|
| 6 | 0.73 | 0.32 | 6.20 | 000473 | 46.90 |
| 6 | 1.09 | 0.32 | 8.60 | 000472 | 47.80 |
| 6 | 1.57 | 0.32 | 11.90 | 000474 | 48.90 |
| 6 | 2.07 | 0.32 | 15.50 | 000475 | 53.90 |
| 5 | 2.57 | 0.32 | 19.00 | 000476 | 62.90 |
| 4 | 3.07 | 0.32 | 22.20 | 000477 | 70.90 |
| 3 | 4.14 | 0.32 | 32.00 | 000478 | 140.00 |

STEEL DECK "OPTI-LINE"

Like a standard deck but, by optimizing its profile and through the use of high-quality steel, up to 3.40 kg lighter with the same load classes.
PU: 60/80 pieces



| | | | | | |
|---|------|------|-------|--------|-------|
| 6 | 0.73 | 0.32 | 5.37 | 006768 | 45.90 |
| 6 | 1.09 | 0.32 | 7.35 | 006769 | 46.80 |
| 6 | 1.57 | 0.32 | 10.20 | 006770 | 47.90 |
| 6 | 2.07 | 0.32 | 13.20 | 006771 | 51.90 |
| 5 | 2.57 | 0.32 | 16.10 | 006772 | 61.70 |
| 4 | 3.07 | 0.32 | 18.80 | 006773 | 69.10 |

STEEL DECK

Levelling deck for closing gaps in staging scaffolding and brackets.
PU: 50/60 pieces



| | | | | | |
|---|------|------|-------|--------|-------|
| 6 | 0.73 | 0.19 | 5.00 | 006879 | 36.00 |
| 6 | 1.09 | 0.19 | 6.40 | 006880 | 40.00 |
| 6 | 1.57 | 0.19 | 8.80 | 003204 | 42.00 |
| 6 | 2.07 | 0.19 | 11.10 | 002217 | 47.70 |
| 5 | 2.57 | 0.19 | 13.40 | 002218 | 55.80 |
| 4 | 3.07 | 0.19 | 15.70 | 002219 | 64.80 |

ALUMINUM DECK WITH STEEL CAPS

Non-slip surface and easy to stack, optimized ratio of weight load capacity because of computer-aided profile optimisation, steel caps with optimised connection claws, thus robust and durable. Patented beam reinforcements in the walking area ensure minimal deflection and best possible slip resistance.
PU: 18 pieces



| | | | | | |
|---|------|------|-------|--------|--------|
| 6 | 0.73 | 0.61 | 6.80 | 006625 | 95.00 |
| 6 | 1.09 | 0.61 | 8.80 | 006627 | 114.00 |
| 6 | 1.57 | 0.61 | 10.90 | 006631 | 125.00 |
| 6 | 2.07 | 0.61 | 14.50 | 006632 | 151.00 |
| 5 | 2.57 | 0.61 | 17.10 | 006633 | 179.00 |
| 4 | 3.07 | 0.61 | 20.30 | 006634 | 203.00 |


INDIVIDUAL NEEDLE EMBOSING



– 3.90

CORNER DECK 0.36 and 0.73 m*

Hot dip galvanized, non-slip deck with deck fastening, as an addition to system surfaces in the inner corner area, in conjunction with corner bracket, see page 18.



DECK FASTENING FOR CORNER DECK*
hot dip galvanized.



| | | | | |
|--------|------|-------|--------|--------|
| 0.32 | 0.32 | 7.00 | 008158 | 109.00 |
| 0.73 | 0.73 | 17.00 | 008159 | 159.00 |
| A/F 22 | – | 1.15 | 008157 | 11.90 |
| A/F 19 | – | 1.10 | 008156 | 11.90 |

COMBI DECK WITH PLYWOOD PANEL

with water-resistant, non-slip and lightweight plywood panels 12 mm BFU 100 G-12, robust riveted head profiles and steel connection claws, hot dip galvanized.

PU: 14 pieces



| Load class | Length m | Width m | Weight approx. kg | Article No. | Price Euro |
|------------|----------|---------|-------------------|-------------|------------|
| 4 | 0.73 | 0.61 | 6.30 | 000479 | 79.00 |
| 4 | 1.09 | 0.61 | 8.40 | 003195 | 88.00 |
| 4 | 1.57 | 0.61 | 13.20 | 000481 | 105.20 |
| 4 | 2.07 | 0.61 | 17.00 | 000482 | 117.50 |
| 3 | 2.57 | 0.61 | 20.00 | 000483 | 134.30 |
| 3 | 3.07 | 0.61 | 23.00 | 000484 | 159.00 |

INDIVIDUAL NEEDLE EMBOSSING



— 3.90

ALU COMBI ACCESS DECK + ALU LADDER

with water-resistant, non-slip and lightweight plywood panels 12 mm BFU 100 G-12, robust riveted head profiles and steel connection claws, hot dip galvanized.

PU: 14 pieces



| | | | | | |
|---|------|------|-------|--------|--------|
| 3 | 2.57 | 0.61 | 24.00 | 000492 | 252.00 |
| 3 | 3.07 | 0.61 | 29.00 | 000494 | 288.00 |

INDIVIDUAL NEEDLE EMBOSSING



— 3.90

FULL ALUMINUM ACCESS DECK

with non-slip ALU deck and integrated ALU ladder*, access flap made of corrugated sheet metal with safety lock, easy release of the integrated access ladder also from the floor surface possible. Head profiles and optimized connection claws from steel, hot dip galvanized.

PU: 14 pieces



| | | | | | |
|---|------|------|-------|--------|--------|
| 4 | 2.07 | 0.61 | 23.30 | 009872 | 295.00 |
| 4 | 2.57 | 0.61 | 23.70 | 000486 | 297.00 |
| 3 | 3.07 | 0.61 | 26.70 | 000488 | 332.00 |

*length 2.07 with extendable aluminum ladder

INDIVIDUAL NEEDLE EMBOSSING



— 3.90

HATCHDECK

Steel, hot dip galvanized, same as above but without integrated ALU ladder.

PU: 14 pieces



| | | | | |
|------|------|-------|--------|--------|
| 2.07 | 0.61 | 17.50 | 000490 | 243.00 |
|------|------|-------|--------|--------|


HATCHDECK

Steel, hot dip galvanized, same as above but with flap that opens to the side.

PU: 14 pieces



| Length m | Width m | Weight approx. kg | Article Nr. | Price Euro |
|-------------|------------|----------------------|----------------|---------------|
|-------------|------------|----------------------|----------------|---------------|

| | | | | |
|------|--|-------|--------|--------|
| 2.57 | | 24.20 | 006522 | 329.00 |
| 3.07 | | 27.20 | 006523 | 359.00 |


ACCESS LADDER ALUMINUM

as a separate ladder for the inside scaffold climbing, with riveted steel claws for safe attachment to the access decks.

| | | | | |
|------|------|------|--------|-------|
| 2.16 | 0.40 | 3.00 | 001323 | 52.00 |
|------|------|------|--------|-------|

ACCESS LADDER STEEL

Hot dip galvanized, as a separate ladder for the inside scaffold climbing, with hook for safe mounting to the access decks.

PU: 80 pieces

| | | | | |
|------|------|-------|--------|-------|
| 2.16 | 0.40 | 10.50 | 000172 | 47.90 |
|------|------|-------|--------|-------|



SQUARE PLUG BLACK
for Access Ladder

steel
ALU

| | | | | |
|------|------|------|--------|------|
| 0.20 | 0.40 | 0.01 | 008441 | 0.40 |
| 0.25 | 0.40 | 0.01 | 008442 | 0.40 |


BASE LEDGER

Steel, hot dip galvanized, as lower attachment for the aluminium stairs, for setting up a deck area in the base section for inside scaffold access.

| | | | |
|------|------|--------|-------|
| 0.73 | 3.00 | 000595 | 32.10 |
| 1.09 | 5.40 | 009148 | 37.50 |


LEDGER

Steel, hot dip galvanized, U-profile with welded couplers, for mounting decks in any intermediate levels.

| | | | |
|------|------|--------|-------|
| 0.73 | 3.60 | 000594 | 39.10 |
| 1.09 | 6.50 | 000593 | 43.40 |


DECK TRANSOM*

Steel, hot dip galvanized, for installation between two assembly frames to create a continuous deck area (see middle of page 25 for installation situation).

| | | | | |
|--------|------|------|--------|-------|
| A/F 19 | 0.73 | 4.70 | 004072 | 48.00 |
| A/F 19 | 1.09 | 6.40 | 002556 | 53.20 |



ALU STAIRS WITH PLATFORM
for bay height 2.00 and 1.00 m,
scaffold stairway for the planned
construction with facade scaffolding for
quick and safe mounting of the levels.
The steps are designed in a non-slip manner
and allow comfortable outside access
for extensive use of scaffold and when
transporting bulky material, without
reducing the work surface in the main walkway.
- Evenly distributed area load $p=2.5\text{ kN/m}^2$
- Single load distributed on $0.2 \times 0.2 \text{ m}^2$ $F=1.5\text{ kN}$
- Meets the requirements according to DIN EN 12811-1.
PU: 10 pieces

Bay 2,57 m

Length
m

3.25

Width
m

0.64

Weight
approx. kg

23.00

Article
No.

000419

Price
Euro

372.00

Bay 3,07 m

3.65

0.64

28.00

000420

453.00

Initial
stairs
1.00 m

1.49

0.64

11.60

006521

255.00



OUTSIDE STAIRCASE HANDRAIL
Steel, hot dip galvanized, for
aluminum platform stairs.
PU: 40 pieces

Bay 2,57 m

3.25

—

16.00

003182

99.20

Bay 3,07 m

3.65

—

16.50

003181

104.00



INSIDE STAIRCASE HANDRAIL
Steel, hot dip galvanized,
for aluminum platform stairs.
PU: 20 pieces

A/F 22

2.25

—

11.50

006942

103.50

A/F 19

2.25

—

11.50

000425

103.50



STAIR GUARD RAIL
Steel, hot dip galvanized,
for aluminum stair with landing 1.00 m.

—

—

6.70

009179

94.00

ROUND INSIDE GUARD RAIL
Steel, hot-dip galvanized.
For mounting to the
stair string.



A/F 19

—


—

5.80

009226

53.40

ACCESS LADDER 1.00 m
Steel, hot-dip galvanized,
with UC-suspension.
Enables easy entry into
the scaffolding, with a
field height of 1.00 m.



1.00

0.62/
0.47


7.60

010407

75.50



GAP COVER*

Steel, hot dip galvanized, non-slip deck, varied use for bridging gaps up to 0.25 m wide, quick assembly due to wedge lock.

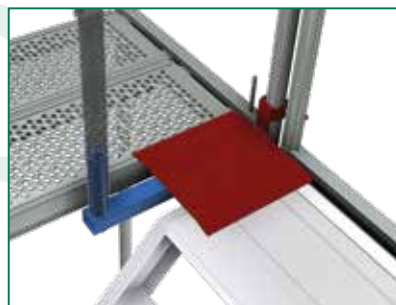
GUARD RAIL BRACKET FOR PLATFORM STAIRS*


A/F 19

| Length m | Width m | Weight approx. kg | Article No. | Price Euro |
|-------------|------------|----------------------|----------------|---------------|
| 0.35 | 0.34 | 3.60 | 007794 | 32.00 |
| 0.60 | 0.34 | 5.60 | 008256 | 51.90 |
| 0.50 | — | 3.20 | 008227 | 36.90 |
| 0.50 | 0.30 | 7.50 | 000234 | 74.00 |
| | 0.61 | 8.50 | 007731 | 64.90 |
| 1-board | 0.32 | 5.00 | 009503 | 49.00 |
| 2-board | 0.63 | 9.20 | 008374 | 60.00 |

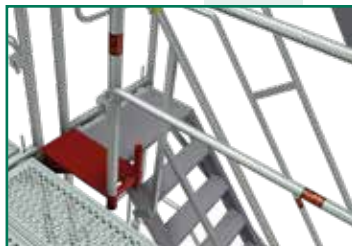STEP ACCESS PLATFORM BRACKET
 to set up a stairway with a scaffold bay.

POLYGON COVERAGE 2-BOARD

Steel, hot dip galvanized, non-slip deck with deck fastening for gap-free construction of round scaffolding from 0 to 50°.


GAP COVER

Steel, hot dip galvanized, non-slip surface. Used to cover gaps in corner scaffolding.
PU: 25 pieces





BASIC COUPLER

T-carrier plate with two parallel welded half couplers to bear vertical loads of scaffold constructions, to be mounted directly on the facade, basic structural analysis available. Extensive lattice beam constructions are no longer necessary.

A/F 22

—

3.60

003247

36.20

A/F 19

—

3.60

004591

36.20

Special couplers, see price list
"Universal Accessories".



NEW

BASIC COUPLER ADJUSTABLE

Some as above but adjustable for wall distances from 148 - 205 mm, with 4 mounting holes.




A/F 22

-


5.00

009137

52.10



148



205



DISTANCE COUPLER

Steel tube Ø 48.3 mm with two welded couplers, galvanized. Can be used, for example as a connection (without a gap) between facade scaffolding and an outside stairway.

Inside micrometer

0.11

1.60

008225

14.60

Inside micrometer

0.12

1.65

009146

15.50

Inside micrometer

0.15

1.80

008297

17.00

Inside micrometer

0.18

2.00

000233

17.50



DIAGONAL BRACE

Steel tube, Ø 42.4 mm. Hot dip galvanized, with swivel wedge coupler, strong vertical bracing of the scaffold parallel to the facade.
PU: 50 pieces

Bay 1.57 m

2.40

6.00

000546

41.80

Bay 2.07 m

2.80

6.50

000554

28.90

Bay 2.57 m

3.20

7.00

000552

30.20

Bay 3.07 m

3.60

8.30

000553

32.40



HORIZONTAL BRACE

Steel tube Ø 48.3 mm. Hot dip galvanized, with welded half couplers, mounting for bracing in the diagonal bay above the base jack.
PU: 50 pieces

Bay 1.57 m

1.57

7.20

008207

49.50

Bay 2.07 m

2.07

9.00

000548

51.00

Bay 2.57 m

2.57

10.80

000550

54.50

Bay 3.07 m


3.07

12.60

000551

64.20



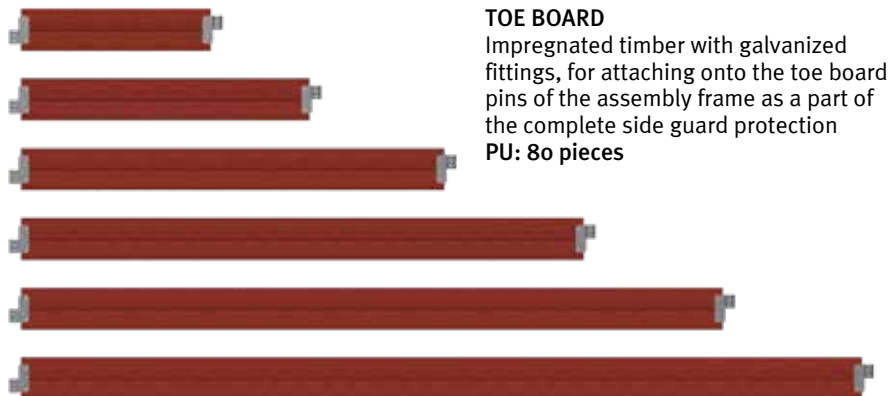

TOE BOARD
 Impregnated timber with galvanized fittings, for attaching onto the toe board pins of the assembly frame as a part of the complete side guard protection
 PU: 80 pieces

| | Length m | Weight approx. kg | Article No. | Price Euro |
|---|-------------|----------------------|----------------|---------------|
| — | 0.73 | 1.50 | 000537 | 11.50 |
| — | 1.09 | 2.50 | 000538 | 12.70 |
| — | 1.57 | 3.00 | 000539 | 13.70 |
| — | 2.07 | 4.00 | 000540 | 14.70 |
| — | 2.57 | 4.80 | 000541 | 15.90 |
| — | 3.07 | 6.50 | 000542 | 17.20 |
| — | 4.14 | 9.00 | 000543 | 29.10 |




MUSTERMANN GB

Prices for printed toe boards
on request.



END TOE BOARD
 Impregnated timber with galvanized fittings, for end protection.
 PU: 100 pieces

| | | | | |
|---|------|------|--------|-------|
| — | 0.73 | 1.50 | 000544 | 10.30 |
| — | 1.09 | 2.00 | 000545 | 11.90 |

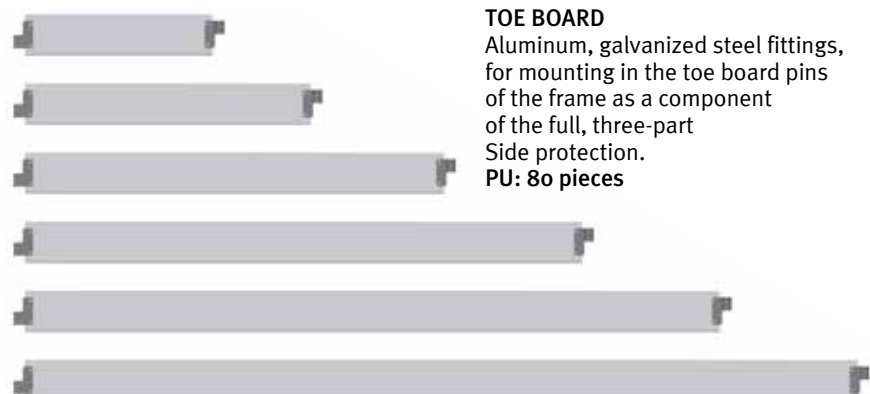

TOE BOARD
 Aluminum, galvanized steel fittings, for mounting in the toe board pins of the frame as a component of the full, three-part Side protection.
 PU: 80 pieces

| | | | | |
|---|------|------|--------|-------|
| — | 0.73 | 1.50 | 010142 | 21.50 |
| — | 1.09 | 2.00 | 010143 | 25.40 |
| — | 1.57 | 2.80 | 010144 | 30.70 |
| — | 2.07 | 3.60 | 010145 | 38.00 |
| — | 2.57 | 4.40 | 010146 | 44.90 |
| — | 3.07 | 5.17 | 010147 | 50.60 |

BACK GUARD RAIL

Steel tube Ø 33.7 mm, hot dip galvanized.

PU: 100 pieces



| Length/ width m | Weight approx. kg | Article No. | Price Euro |
|--------------------|----------------------|----------------|---------------|
| 0.73 | 1.20 | 000499 | 12.90 |
| 1.09 | 2.20 | 000500 | 13.40 |
| 1.57 | 2.40 | 000501 | 13.90 |
| 2.07 | 3.80 | 000502 | 15.30 |
| 2.57 | 4.60 | 000503 | 16.40 |
| 3.07 | 5.90 | 000504 | 17.50 |

DOUBLE GUARD RAIL

Steel tube Ø 33.7 mm, hot dip galvanized.

PU: 40 pieces



| | | | |
|------|-------|--------|-------|
| 0.73 | 4.10 | 000506 | 28.90 |
| 1.09 | 5.40 | 000507 | 31.50 |
| 1.57 | 7.20 | 000509 | 35.70 |
| 2.07 | 9.80 | 000510 | 38.70 |
| 2.57 | 11.80 | 000511 | 41.00 |
| 3.07 | 13.50 | 000512 | 47.20 |
| 4.14 | 21.00 | 000513 | 96.00 |

DOUBLE END GUARD RAIL

Aluminum tube Ø 40 mm.

PU: 40 pieces



| | | | |
|------|------|--------|-------|
| 1.57 | 3.00 | 002212 | 49.80 |
| 2.07 | 4.00 | 002211 | 68.90 |
| 2.57 | 5.00 | 002210 | 74.10 |
| 3.07 | 5.80 | 002205 | 86.00 |

DOUBLE END GUARD RAIL

same as before, with diagonal struts.

PU: 40 pieces

| | | | |
|------|------|--------|-------|
| 1.57 | 3.70 | 009244 | 51.80 |
| 2.07 | 4.90 | 009660 | 70.00 |
| 2.57 | 6.00 | 007697 | 76.90 |
| 3.07 | 6.80 | 007698 | 88.60 |

DOUBLE END GUARD RAIL

Steel tube Ø 33.7 mm or 26.9 mm, hot dip galvanized for double side guards at the ends.


PU: 35 pieces



| | | | | |
|--------|------|------|--------|-------|
| A/F 22 | 0.73 | 3.40 | 006951 | 28.40 |
| A/F 19 | 0.73 | 3.40 | 000530 | 28.40 |
| A/F 19 | 1.09 | 3.80 | 000531 | 31.30 |

END GUARD RAIL 1-BOARD

Steel tube Ø 33.7 mm, hot dip galvanized. Double side protection on front sides. Can be used for side protection on round scaffolding.

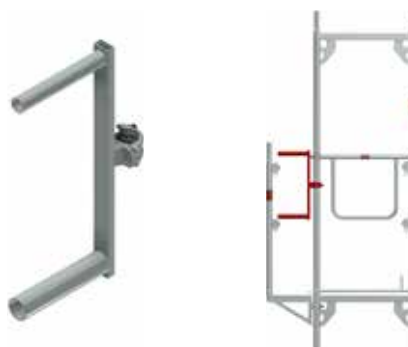

| | | | |
|---|------|--------|-------|
| – | 2.60 | 009366 | 20.70 |
|---|------|--------|-------|








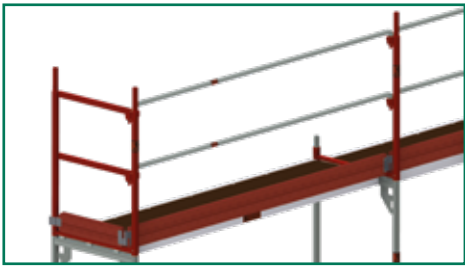


GUARD RAIL COUPLER

to fasten additional guard rails for example on inside.

PU: 35 pieces

| | | | | |
|--------|---|------|--------|-------|
| A/F 22 | – | 1.20 | 002464 | 15.20 |
| A/F 19 | – | 1.20 | 000591 | 15.20 |




| | | Length m | Width m | Weight approx. kg | Article No. | Price Euro |
|---|--|-------------|------------|----------------------|----------------|---------------|
|  | INSIDE GUARD RAIL POST WITH TOE BOARD PIN Steel, hot dip galvanized, for attaching additional inside guard rails and a toe board to the vertical frame. PU: 100 pieces | | 0.99 | 3.29 | 006137 | 29.70 |
| |   | | | | | |
|  | END GUARD RAIL FRAME STEEL Steel tube Ø 48.3 mm, hot dip galvanized. Forms side guard and deck fastening on the top scaffold platform. PU: 20 pieces | 1.00 | 0.73 | 12.50 | 000865 | 65.00 |
| | | 1.00 | 1.09 | 14.70 | 000556 | 73.10 |
| | TOP END GUARD RAIL POST ALU Aluminum, same as above. PU: 20 pieces | 1.00 | 0.73 | 5.30 | 000866 | 84.10 |
|  | GUARD RAIL POST Steel tube Ø 48.3 mm, hot dip galvanized, for mounting guard rail and fastening scaffolding decks to the top scaffold platform. Security pins ensure that lift-off is prevented. PU: 44 pieces | 1.00 | 0.73 | 6.50 | 000867 | 36.20 |
| | | 1.00 | 1.09 | 7.30 | 000869 | 37.90 |
| | GUARD RAIL FRAME ALU Aluminum, same as above. PU: 44 pieces | 1.00 | 0.73 | 2.80 | 000870 | 46.20 |
| |  | | | | | |
|  | SINGLE GUARD RAIL POST Steel tube Ø 48.3 mm, hot dip galvanized, with tube connector and short deck fastening, for use with single-board brackets. PU: 50 pieces | 1.00 | — | 5.10 | 000871 | 26.30 |
| | SINGLE GUARD RAIL POST ALU Aluminum, same as above. PU: 50 pieces | 1.00 | — | 2.10 | 000872 | 35.80 |
|  | SINGLE GUARD RAIL POST Steel tube Ø 48.3 mm, hot dip galvanized, with tube connector, without deck fastening. PU: 50 pieces | 1.00 | — | 4.70 | 000873 | 25.50 |



GUARD RAIL POST 2.00 m
Steel tube Ø 48.3 mm, hot dip galvanized, with tube connector and short deck fastening. Its use in guard and roof guard scaffolds is not permitted.
PU: 50 pieces

| Length m | Width m | Weight approx. kg | Article No. | Price Euro |
|-------------|------------|----------------------|----------------|---------------|
| 2.00 | — | 9.50 | 000875 | 51.00 |

GUARD RAIL FOR ROOF RAIL 1.09 m
Steel tube Ø 48.3 mm, hot dip galvanized, 2.00 m high, 1.09 m width, for securing the deck level and fastening side protective nets, also suitable for attachment of protective side nets in conjunction with guard rails, approved for the setting up of guard and roof guard scaffolds as per DIN 4420.
PU: 44 pieces

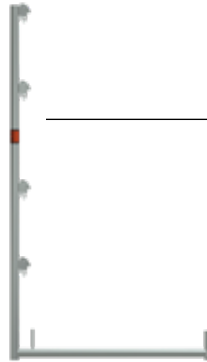


| | | | | |
|------|------|-------|--------|-------|
| 2.00 | 1.09 | 14.00 | 000563 | 84.20 |
|------|------|-------|--------|-------|



GUARD RAIL FOR ROOF RAIL 0.73 m
Steel tube Ø 48.3 mm, hot-dip galvanized, for use on vertical frames and brackets 0.36, 0.50 and 0.73 m, for securing the top deck level and fastening side protective nets, also suitable for attachment of protective side nets in conjunction with guard rails, approved for the setting up of guard and roof guard scaffolds as per DIN 4420.
PU: 44 pieces

| | | | | |
|------|------|-------|--------|-------|
| 2.00 | 0.73 | 12.00 | 007354 | 81.40 |
|------|------|-------|--------|-------|

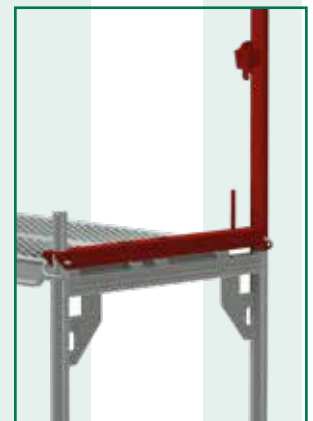
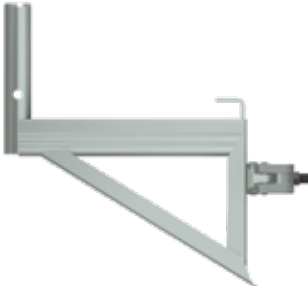



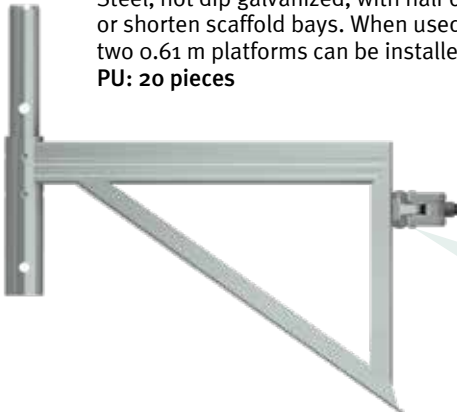




REINFORCEMENT FOR ROOF RAIL
Steel, hot-dip galvanized, to reinforce the guard rail for roof rail, at one field length over 3.07 m.

| | | | | | |
|--------|------|---|------|--------|-------|
| A/F 22 | 1.30 | — | 7.50 | 010063 | 42.80 |
|--------|------|---|------|--------|-------|





| | | | Width m | Weight approx. kg | Article No. | Price Euro |
|---|---|--------|------------|----------------------|----------------|---------------|
|  | BRACKET 0.22 m Steel, hot dip galvanized, with half coupler, without tube connector with integrated deck retainer. PU: 200 pieces | A/F 22 | 0.22 | 2.50 | 005839 | 25.00 |
| | | A/F 19 | 0.22 | 2.50 | 006949 | 25.00 |
|  | BRACKET 0.36 m Steel, hot dip galvanized, with half coupler, without tube connector with integrated deck retainer. PU: 100 pieces | A/F 22 | 0.36 | 3.70 | 006945 | 29.40 |
| | | A/F 19 | 0.36 | 3.70 | 000582 | 29.40 |
|  | BRACKET WITHOUT TUBE CONNECTOR 0.36 m Hot dip galvanized, with half coupler. PU: 100 pieces | A/F 22 | 0.36 | 3.50 | 000584 | 31.10 |
| | | A/F 19 | 0.36 | 3.50 | 007485 | 31.10 |
|   | CORNER BRACKET WITHOUT TUBE CONNECTOR* Steel, hot dip galvanized. A welded on half coupler at a staggered height enables 2 brackets to be connected to one stand pipe. PU: 20 pieces | A/F 19 | 0.36 | 4.70 | 008087 | 37.00 |
| | | A/F 19 | 0.73 | 6.50 | 008086 | 45.50 |
|    | SYSTEM GRID BRACKET 0.50 m Steel, hot dip galvanized, with half coupler, used mainly to expand or shorten scaffold bays. When used as a scaffold widening, two 0.61 m platforms can be installed without gaps. PU: 20 pieces | A/F 19 | 0.50 | 5.40 | 007126 | 37.70 |




BRACKET WITHOUT GAPS 0.32 m
Steel, hot dip galvanized, with half coupler, without tube connector with integrated deck retainer, ensures, in conjunction with the UC assembly frame, a gap free deck level between the main bay and bracket bay.
PU: 100 pieces




BRACKET WITHOUT GAPS 0.19 m
Same as above, but for decks 0.19 m, for use up to load class 3.
PU: 100 pieces



BRACKET 0.73 m
Steel, hot dip galvanized, with half coupler, assembly only with support (for example, cross diagonal, see page 18).
PU: 20 pieces



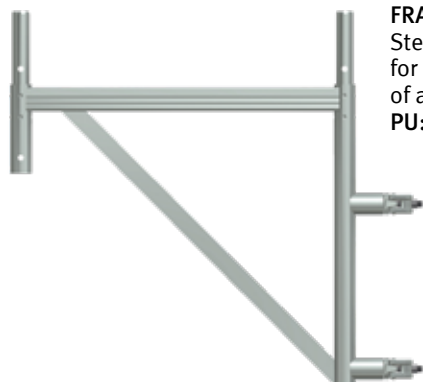



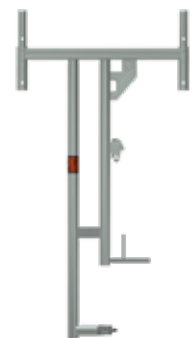
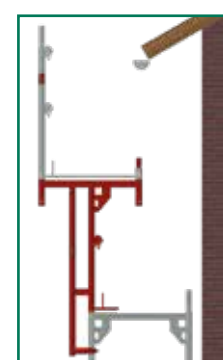


BRACKET WITHOUT TUBE CONNECTOR 0.73 m*
Steel, hot dip galvanized, with half coupler.
PU: 20 pieces



FRAME BRACKET 0.73 m
Steel, hot dip galvanized, for scaffold expansion and construction of a roof guard without gaps.
PU: 20 pieces

| | Width m | Weight approx. kg | Article No. | Price Euro |
|--------|------------|----------------------|----------------|---------------|
| A/F 19 | 0.32 | 3.10 | 006676 | 35.50 |
| A/F 19 | 0.19 | 1.70 | 007138 | 33.00 |
| A/F 19 | 0.73 | 6.20 | 000585 | 38.20 |
| A/F 22 | 0.73 | 6.10 | 006946 | 38.20 |
| A/F 19 | 0.73 | 5.90 | 000592 | 36.50 |
| A/F 19 | 0.73 | 10.00 | 000589 | 67.50 |

| | | | Length m | Width m | Weight approx. kg | Article No. | Price Euro |
|--|---|--------|-------------|------------|----------------------|----------------|---------------|
| BRACKET 0,73 m* with half coupler, steel, hot dip galvanized, for use up to load class 3 without bracing. PU: 20 pieces |  | A/F 19 | – | 0.73 | 9.20 | 009068 | 64.90 |
| | | | – | – | – | – | – |
| BRACKET 1.09 m with half coupler, steel, hot dip galvanized. assembly only with support (for ex- ample, cross diagonal). PU: 20 pieces |  | A/F 19 | – | 1.09 | 9.00 | 000586 | 86.30 |
| | | A/F 22 | – | 1.09 | 9.00 | 006947 | 86.30 |
| T-DECKING FASTENER coated, signal red RAL 3001. As a safe guard against taking off. |   | | – | 0.30 | 0.80 | 009518 | 3.90 |
| COTTER PIN for fixing the T-deck fastener. |  | | – | – | 0,01 | 002232 | 0,40 |
| CROSS DIAGONAL Steel, hot dip galvanized, with two half couplers for bracing 2-board assembly frame perpendicular to the facade and for supporting 2-board brackets. | | | 1.77 | – | 5.30 | 000588 | 37.70 |
|  | CROSS DIAGONAL Same as above, but for bracing 3-board assembly frame and for supporting 3-board brackets. | | 1.95 | – | 5.80 | 000587 | 39.60 |
| ROOFER BRACKET meets different requirements for ergonomic workplaces for painters and tinsmiths, not to be used as a roof guard scaffold, for use up to load class 3. PU: 12 pieces |   | | – | 0.73 | 15.60 | 000275 | 103.00 |



ROOF GUARD EXTENSION

Steel tube Ø 48.3 mm, hot dip galvanized, use in connection with a frame bracket 0.73 m and deck fastening.



DECK FASTENING

Steel, hot dip galvanized, suitable for roof guard extensions.



| Length m | Width m | Weight approx. kg | Article No. | Price Euro |
|-------------|------------|----------------------|----------------|---------------|
| – | 0.73 | 4.00 | 000518 | 28.00 |
| – | 2-board | 2.00 | 000590 | 38.00 |
| 0.97 | – | 4.50 | 000571 | 31.50 |
| 2.25 | – | 9.00 | 000567 | 54.50 |
| 2.57 | – | 11.00 | 000569 | 69.80 |
| 3.21 | – | 13.50 | 000566 | 81.50 |
| 4.17 | – | 18.00 | 000568 | 99.60 |
| 5.13 | – | 22.50 | 000570 | 127.50 |
| 6.09 | – | 26.50 | 000572 | 152.80 |
| – | 0.32 | 1.00 | 000580 | 11.50 |
| – | 0.50 | 1.20 | 007745 | 13.10 |
| – | 0.73 | 1.50 | 000581 | 14.50 |
| – | 1.09 | 2.00 | 000579 | 18.50 |
| – | – | 0.70 | 006850 | 11.00 |
| – | 0.40 | 1.50 | 007302 | 19.50 |

U-TRANSOM DECK LEDGER

Steel, hot dip galvanized, with half couplers, for mounting decks on lattice beams and platform scaffolds.



DECK FASTENING

Steel, hot dip galvanized, for brackets.



DECK FASTENING WITH WEDGE

Steel, hot dip galvanized, for preventing decks from lifting off.

DECK FASTENING WITH WEDGE
Steel, hot dip galvanized, for preventing decks from lifting off.



| | Length m | Weight approx. kg | Article No. | Price Euro |
|--|-------------|----------------------|----------------|---------------|
|--|-------------|----------------------|----------------|---------------|

**BASE SPINDLE**

Steel, hot dip galvanized, for adjusting level with differences in height of the ground, with tube spindle, base plate 150 x 150 mm, knurled nut with collar for centring the shaft on the spindle, lock to prevent unscrewing of the knurled nut and to ensure the necessary bridging length, can also be used as a head spindle.

SWIVEL BASE SPINDLE

with swiveling base plate, 150 x 150 mm, additional longitudinal scaffold bracing required at in the base, permissible load: 25.4 kN.


BASE SPINDLE SOLID

Steel, galvanized, for high permissible loads, with knurled nut, fast action thread, base plate 150 x 150 mm.

| | | | | |
|---------|------|------|--------|-------|
| PU: 375 | 0.30 | 2.40 | 000318 | 12.00 |
| PU: 300 | 0.50 | 3.10 | 000319 | 14.50 |
| PU: 300 | 0.60 | 3.40 | 000320 | 15.00 |
| PU: 250 | 0.78 | 3.90 | 000321 | 19.90 |
| PU: 200 | 1.00 | 4.70 | 000322 | 24.90 |

| | | | | |
|---------|------|------|--------|-------|
| PU: 250 | 0.50 | 3.10 | 000323 | 35.00 |
|---------|------|------|--------|-------|

| | | | | |
|---------|------|------|--------|-------|
| PU: 200 | 0.60 | 6.70 | 007095 | 32.20 |
|---------|------|------|--------|-------|

**ADJUSTMENT TUBE**


Steel, hot dip galvanized, for levelling unequal ground, use in connection with a decking transom and base jack. Adjustment range 10 x 0.10 m = 1.00 m.

| | | | | |
|---|------|------|--------|-------|
| – | 1.70 | 5.80 | 000402 | 42.90 |
|---|------|------|--------|-------|

**SPINDLE SECURITY**

Serves for securing spindle feet when moving a scaffold. The attachment to the tube is done with a half coupler.

| | | | | |
|---|------|------|--------|-------|
| – | 0.40 | 2.00 | 010294 | 20.90 |
|---|------|------|--------|-------|

**PROTECTIVE PAD FOR BASE JACK**

Plastic, with reflector.

| | | | | |
|---|---|---|--------|------|
| – | – | – | 008110 | 3.20 |
|---|---|---|--------|------|

**UNDERLAY WOODS**

40 x 240 x 1000 mm +/- 10 mm
 40 x 240 x 1500 mm +/- 10 mm
 as a load-distributing support, sawn.

| | | | | |
|---|------|------|--------|------|
| – | 1.00 | 1.50 | 009203 | 7.50 |
| – | 1.50 | 2.25 | 010360 | 9.10 |


**STANDARD COUPLER**

Robust model, steel, drop-forged, hot dip galvanized, for right-angled connection of tubes of Ø 48.3 mm, class BB, EN 74-1 RA BB C3 M, to be used in the classes B and BB of the steel and aluminum tube. Alternatively, with quick release thread* according to the general building approval. PU: 25 pieces

| | | | | |
|--------|---|------|--------|------|
| A/F 22 | – | 1.15 | 000325 | 6.40 |
| A/F 19 | – | 1.15 | 000326 | 6.40 |

with quick release thread

| | | | | |
|---------|---|------|--------|------|
| A/F 22* | – | 1.15 | 007521 | 6.90 |
| A/F 19* | – | 1.15 | 007523 | 6.90 |

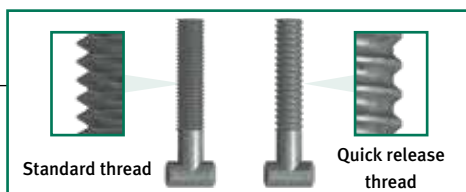


| | | | | |
|--------|---|------|--------|------|
| A/F 22 | – | 1.35 | 000328 | 6.80 |
| A/F 19 | – | 1.35 | 000329 | 6.80 |

**SWIVEL COUPLER**

Heavy-duty steel model, ribbed, hot dip galvanized, for any angular connection of tubes of Ø 48.3 mm, class B, EN 74-1 SW B C3 M, to be used in class B of the steel and aluminum tube. Alternatively, with quick release thread* according to the general building approval. PU: 25 pieces

| | | | | |
|----------------------------------|---|------|--------|------|
| with quick release thread | | | | |
| A/F 22* | – | 1.35 | 007522 | 7.30 |
| A/F 19* | – | 1.35 | 007524 | 7.30 |



SCAFFOLD PALLET FOR VERTICAL FRAME

Steel tube, hot-dip galvanized, continuous fork mount for safe fork-lift transport. Additional cut-outs allow side retracting.
PU: 5 pieces



UC 70

UC 100


| Length m | Width m | Weight approx. kg | Article No. | Price Euro |
|-------------|------------|----------------------|----------------|---------------|
| 1.11 | 0.79 | 31.10 | 008317 | 210.00 |
| 1.11 | 1.16 | 38.70 | 008367 | 236.00 |

New Model!



STACKING PALLET FOR TUBES

Steel tube, hot-dip galvanized. Specially suited for module scaffolds, standards, ledgers, guard rails, diagonal braces, tubes and toe boards. Open all round, suited for stacked and crane transports. The tubular supports are removable and are to be stowed securely in the base frame so that empty pallets can be transported and stacked in a very space-saving manner.
PU: 5 pieces



| | | | | |
|------|------|-------|--------|--------|
| 0.85 | 0.85 | 30.50 | 006962 | 152.00 |
| 1.25 | 0.55 | 31.80 | 010334 | 162.00 |
| 1.25 | 0.85 | 35.00 | 005614 | 167.00 |

Special orders on request!



PALLET FOR TUBES

Steel, hot-dip galvanized, robust model, cannot be dismantled, with crane lugs.

| | | | | |
|------|------|-------|--------|--------|
| 1.10 | 0.60 | 39.90 | 007980 | 182.00 |
|------|------|-------|--------|--------|



STACK PALETTE

Steel, hot-dip galvanized. Can be combined with grid boxes and pickup for crane hook.

| | | | | |
|------|------|-------|--------|--------|
| 1.20 | 0.80 | 42.00 | 010176 | 299.00 |
|------|------|-------|--------|--------|

NEW



INDUSTRIAL LATTICE BOX with wooden deck. On a side with half flap.

Fill height 1000 mm

Fill height 400 mm

Fill height 330 mm

| | | | | |
|------|-------|-------|--------|--------|
| 1.00 | 0.800 | 85.00 | 002249 | 274.00 |
| 1.24 | 0.835 | 85.00 | 009749 | 259.00 |
| 1.24 | 0.835 | 85.00 | 009750 | 239.00 |

PACKAGING TAPE
painted with zinc dust, 0.5 x 16 mm (as a ring).

| | | | | |
|---|---|-------|--------|--------|
| — | — | 45.00 | 002228 | 165.00 |
|---|---|-------|--------|--------|











STRAPPING TOOL FOR PACKAGING TAPE

| | | | | |
|---|---|---|--------|----------|
| — | — | — | 002428 | 1,530.00 |
|---|---|---|--------|----------|

DISPENSER FOR STEEL STRIP



| | | | | |
|---|---|---|--------|--------|
| — | — | — | 002429 | 422.50 |
|---|---|---|--------|--------|






| | | | PU | Length m | Weight approx. kg | Article No. | Price Euro |
|---|---|---|--|-------------|----------------------|----------------|---------------|
|  | WALL TIE WITH PLATE Steel tube Ø 48.3 mm, hot dip galvanized, installation with a standard coupler. |  | — | 0,70 | 2,70 | 000124 | 15.00 |
| | | | — | 0.30 | 1.40 | 000240 | 9.35 |
|  | WALL TIE Steel tube Ø 48.3 mm, hot dip galvanized. Installation as short scaffold tie with one standard coupler, as long scaffold tie with two standard couplers. | | — | 0.40 | 1.80 | 000242 | 9.75 |
| | | | — | 0.50 | 2.00 | 000125 | 10.00 |
| | | | — | 0.60 | 2.60 | 000241 | 12.00 |
| | | | — | 0.80 | 3.20 | 000129 | 13.20 |
| | | | — | 1.00 | 3.80 | 000127 | 14.20 |
| | | | — | 1.30 | 4.80 | 000131 | 17.50 |
| | | | — | 1.50 | 5.50 | 000132 | 18.60 |
|  | WALL TIE* Steel tube Ø 48.3 mm, hot dip galvanized. Hook is welded at the inside of the tube for ideal connection of the couplers. |  | — | 0.18 | 0.95 | 009190 | 11.80 |
| | | | | | | | |
|  | ANCHOR BRIDGE WDV Set with WDV bridge and two eye bolts for the anchoring of scaffolding to house walls, especially for WDV. Even with a lever arm of 28 cm a sufficient load capacity is guaranteed parallel to the house wall. | | — | — | 3.61 | 009141 | 71.80 |
| | | | WDVS = Thermal insulation composite system | | | | |
|  | EYE BOLT Galvanized and welded, Ø 12 mm, to be used with an expansion plug. | | 150 | 0.09 | 0.155 | 000358 | 1.10 |
| | | | 150 | 0.12 | 0.175 | 000359 | 1.20 |
| | | | 100 | 0.16 | 0.210 | 000360 | 1.30 |
| | | | 100 | 0.19 | 0.235 | 000363 | 1.40 |
| | | | 100 | 0.23 | 0.265 | 000361 | 1.50 |
| | | | 50 | 0.30 | 0.300 | 002374 | 1.65 |
| | | | 50 | 0.35 | 0.364 | 000362 | 1.95 |
|  | EXPANSION PLUG for eye bolts with a timber thread Ø 12 mm for drilling Ø 14 mm. | | 100 | 0.07 | 0.007 | 000357 | 0.25 |
|  | PLASTIC CAP For closing anchor drill holes. | nature | 100 | — | 0.003 | 000651 | 0.15 |
| | | black | 100 | — | 0.003 | 010353 | 0.15 |
|  | SECURITY PIN For securing the scaffold joints against unintentional lift-off, for example, when moving scaffold units with a crane or in special wind conditions, Ø 9 mm. | | — | — | 0.15 | 000508 | 0.95 |

*Approval procedure not yet completed

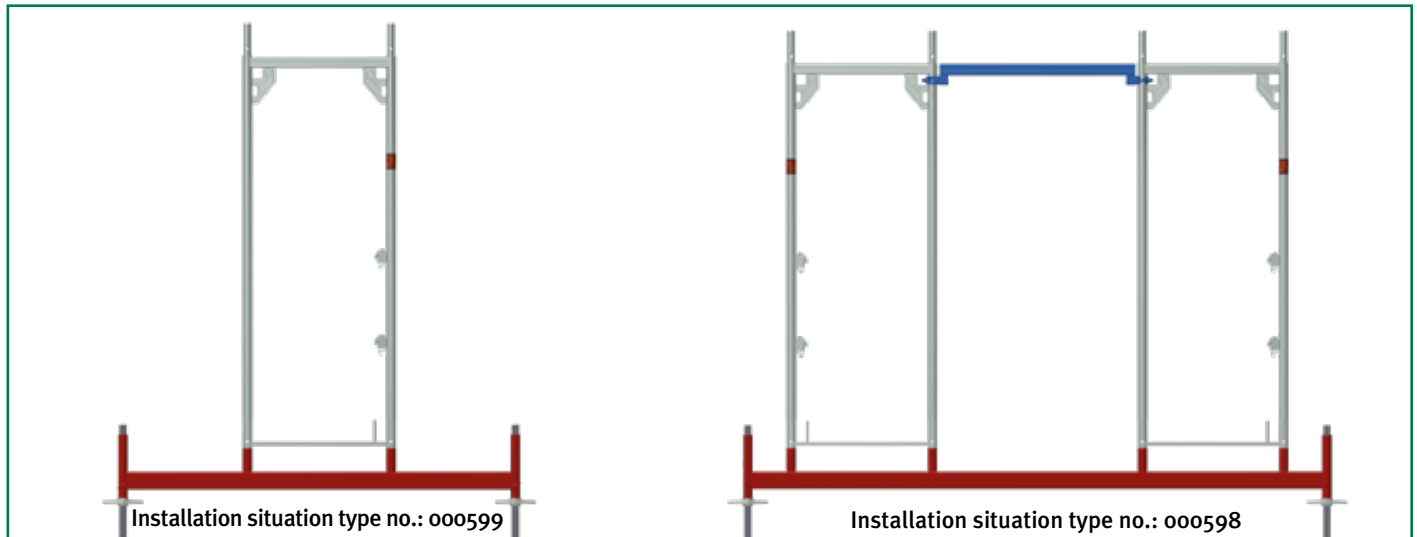

| | Width m | Weight approx. kg | Article No. | Price Euro |
|---|------------|----------------------|----------------|---------------|
|  <p>ROLLING TOWER 2.00 m Steel, rectangular tube, hot dip galvanized, all requirements of DIN 4420-3 must be met for mobile scaffolding with a steel beam, this applies particularly to sufficient ballast, safe inside climbing via access floors with ladders and the necessary side guards at each floor level.</p> | 2.00 | 21.00 | 000599 | 95.50 |
|  <p>ROLLING TOWER 3.00 m Steel, rectangular tube, hot dip galvanized, to create mobile scaffolds.</p> | 3.00 | 32.00 | 000598 | 166.00 |



| | | | | |
|--|--------------|--------------|------------------|----------------|
|  <p>CASTOR WITH SPINDLE Bearing 10 kN with central load distribution, castor Ø 200 mm made of polyamide with run stop, levelling through adjustable steel spindle. The DIN 4420-3 applies when a rolling towers ist made of a scaffolding. A standard proof of stability is required for this mobile scaffolding. PU: 100 pieces</p> | – | 7.00 | 000332 | 95.50 |
|  <p>DECK LEDGER FOR LATTICE BEAMS* Steel, hot dip galvanized, for further extensions in the scaffoldbay raster when bridging with lattice beams.</p> | 0.73 1.09 | 5.50 9.10 | 008161 010158 | 62.00 74.10 |





FALLSTOP SET SCAFFOLDING 1
including:

HARNESS
STRIPE BASIC CLICK LIGHT
with vain protection.

COMFORT SHOULDER PAD

BACK EYE EXTENSION TIE 50 m

FLEX SHOCK ABSORBER
elastic webbing with safety and tube hooks

DEVICE BAG size 3

Article
No.

Price
Euro

010611

249.00*



FALLSTOP SET SCAFFOLDING 2
including:

HARNESS
STRIPE BASIC CLICK LIGHT
with vain protection.

COMFORT SHOULDER PAD

BACK EYE EXTENSION TIE 50 m

SELF-WINDING BELT SHOCK ABSORBER
with belt tensioner RETRAK 2.00 m

DEVICE BAG size 4

010612

309.00*

EC-type examination certificate

For the safety system, there is an EC-type examination certificate issued by the German Social Accident Insurance (DGUV), expert committee PPE. Insurance Association for occupational health checks

*Net prices



**HARNESS
STRIPE BASIC CLICK**
Universal harness for all application situations.
Special designed for needs of handcraft
and scaffolding in accordance with EN 361.

Article
No.

Price
Euro

009646

105.00*



FLEX STRETCH STOP SHOCK
Elastic webbing with securing hooks
and Pipe hook 2A / 501.

009648

98.00*



SHOULDERPAD COMFORT BLACK
The shoulderpad protects against the friction
of the shoulderstrape on the skin. It is fastened by
a hook and loop fastener under the straps.

black

009647

39.00*



BACK EYELET EXTENSION TIE
Secure with the back eyelet of the safety
harness this extension provides scaffolding
builders extension when working on scaffolding.
To secure an easy attaching of the safety device.
With industrial license.

50 cm

009649

29.00*

80 cm

009650

36.00*



CARABINER HOOK HEART LIGHT
With TL-Plus closure, ALU anodised.
The special heart shape prevents the slippage of the
Carabiner hook. Opening diameter: 22 mm.

009651

19.20*



HAMMER AND RATCHET CARRIER

left slanted

009652

16.00*

right slanted

009653

16.00*



BELT STORAGE BAG
Bag for storage and transport of a safety harness
with absorbing connecting Lanyard.
Adjustable shoulder straps.
Recommended load up to ca. 5 kg. Colour: black.

009741

46.00*



ANCHORAGE PROTECTION SET LORY
Compact rescue set especially for scaffolding assembly.
The lifting function makes it possible to rescue
the fallen person and evacuate him/her to the
next scaffolding level as well as a rescue
abseiling downwards.

30 m

009655

484.00*

50 m

009656

484.00*

*Net prices


SF PREMIUM SET "MILLER"
 including:

**SAFETY HARNESS
REVOLUTION R2 SCAF**

with front and back stopper loop, sharp-edge tested back loop extensions, quick adjustment, automatic closures, comfort back pads, belt-end clips, elastic duraflex belt band, swivel connection, EN 361.

FIXING MEANS
WITH STRAP FALL ATTENUATOR

Length 2.00 m, sharp-edge tested, horizontally approved (stopping point at base height), 63 mm scaffold hook, flexible design for added movement, safety clip to fasten safety harness, teflon-coated for longer service life, EN 354 and EN 355.

EQUIPMENT BAG

0.27 x 0.50 m (D x L), made of PVC, red.

| Article No. | Price Euro |
|-------------|----------------|
| S-M | 006273 249.00* |
| L-XL | 005610 249.00* |


WARN VEST NEON YELLOW

2 reflective strips surrounding (according to DIN). Regulation of the width by Velcro strips in front. Packed in a handy bag.

| | |
|--------|-------|
| 010607 | 9.90* |
|--------|-------|


SCAFFOLDING POUCH PREMIUM (L)


PVC-hard foil, DIN A5 high, with two metal eyes up / down and clear slot-in-sleeve for classification of the scaffold on site.

| | |
|--------|-------|
| 000653 | 2.90* |
|--------|-------|

SCAFFOLDING POUCH STANDARD (R)

PVC-soft foil, DIN A5 high, with a perforation up/down and clear slot-in-sleeve for classification of the scaffold on site.

| | |
|--------|-------|
| 009896 | 2.15* |
|--------|-------|


FORM BLOCK, DIN A4

Triple carbon copies, 25 records per block, for mounting the scaffold signs and classification of the scaffold on site.

| | |
|--------|-------|
| 000654 | 3.80* |
|--------|-------|

EXPERT TEST

of personal protective equipment according to BGG 906 (principle of the German Employers' Liability Insurance Association for occupational health checks).

| | |
|--------|--------|
| 007614 | 25.00* |
|--------|--------|



UVEX PROTECTIVE HELMET ALPINE
For height work and rescue
Tested and marked according to EN 397
(industrial protection helmets) and
EN 12492 (Mountaineering helmets).

| | Article No. | Price Euro |
|--------|-------------|------------|
| white | 009684 | 73.10* |
| red | 009685 | 73.10* |
| yellow | 009686 | 73.10* |
| orange | 009687 | 73.10* |
| green | 009688 | 73.10* |
| blue | 009689 | 73.10* |
| black | 009690 | 73.10* |




UVEX PROTECTIVE HELMET PHEOS S-KR
Tested and approved
According to EN 397 with 4-point chin straps
According to EN 397 pre assembled on the helmet.

| | | |
|--------|--------|--------|
| white | 009392 | 20.50* |
| black | 009393 | 20.50* |
| yellow | 009394 | 20.50* |
| blue | 009395 | 20.50* |



KASK INDUSTRIAL CLIMBING HELMET PLASMA Q
Tested and approved acc. EN 397.
With chin strap. Adjusting wheels allow one
quick and easy adjustment to the right size.
With ring for attaching the helmet to a belt.

| | | |
|------------|--------|--------|
| white | 010497 | 58.00* |
| yellow | 010498 | 58.00* |
| orange | 010499 | 58.00* |
| red | 010500 | 58.00* |
| green | 010501 | 58.00* |
| dark green | 010502 | 58.00* |
| royal blue | 010503 | 58.00* |
| black | 010453 | 58.00* |

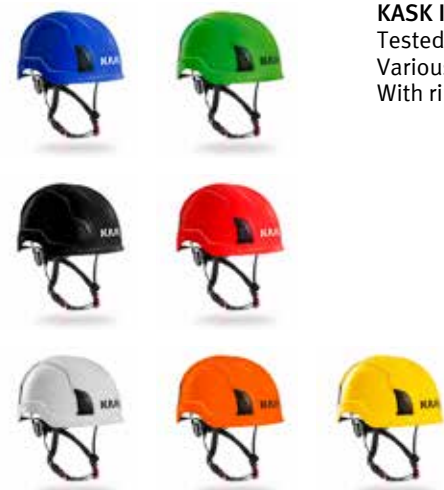

KASK INDUSTRIAL CLIMBING HELMET ZENITH
Tested and approved acc. EN 397 and EN 50365.
Various settings allow a quick and easy adjust.
With ring for attaching the helmet to a belt.

| | | |
|--------|--------|--------|
| blue | 010504 | 69.00* |
| white | 010505 | 69.00* |
| yellow | 010506 | 69.00* |
| orange | 010507 | 69.00* |
| red | 010508 | 69.00* |
| green | 010509 | 69.00* |
| black | 010510 | 69.00* |

| Scaffold bay length 2.57 m Scaffold length (m) x Working height (m) Working surface | Article No. | List price € | 102.80 x 10.20 1,048 m ² | 51.40 x 10.20 524 m ² | 30.84 x 10.20 314 m ² | 15.42 x 10.20 157 m ² | 10.28 x 10.20 105 m ² |
|---|-------------|-----------------|---|--|--|--|--|
| BASIC EQUIPMENT | | | | | | | |
| Assembly frame 2.00 x 0.73 m steel | 000853 | 63.10 | 164 | 84 | 52 | 28 | 20 |
| Steel deck "OPTI-LINE" 2.57 m x 0.32 m | 006772 | 61.70 | 320 | 160 | 96 | 48 | 32 |
| Diagonal 2.57 m bay | 000552 | 30.20 | 32 | 16 | 12 | 8 | 4 |
| Back guard rail 2.57 m, twice | 000503 | 16.40 | 360 | 180 | 108 | 54 | 36 |
| Toe board 2.57 m | 000541 | 15.90 | 160 | 80 | 48 | 24 | 16 |
| End toe board 0.73 m | 000544 | 10.30 | 8 | 8 | 8 | 8 | 8 |
| Double end guard rail 0.73 m | 000530 | 28.40 | 6 | 6 | 6 | 6 | 6 |
| Guard rail post 0.73 m with deck fastening | 000867 | 36.20 | 39 | 19 | 11 | 5 | 3 |
| Top end guard rail post 0.73 m | 000865 | 65.00 | 2 | 2 | 2 | 2 | 2 |
| Base jack 0.60 m | 000320 | 15.00 | 82 | 42 | 26 | 14 | 10 |
| Horizontal brace 2.57 m | 000550 | 54.50 | 8 | 4 | 3 | 2 | 1 |
| Total price in € | – | – | 42,967.40 | 21,798.20 | 13,435.70 | 7,120.00 | 4,897.90 |
| Total weight (kg) | – | – | 11,395.30 | 5,762.10 | 3,532.10 | 1,849.90 | 1,263.30 |
| Price per m ² in € | – | – | 41.00 | 41.60 | 42.79 | 45.35 | 46.65 |
| ANCHORING | | | | | | | |
| Wall tie 0.60m | 000241 | 12.00 | 43 | 23 | 13 | 9 | 6 |
| Standard coupler with collar nut A/F 19 | 000326 | 6.40 | 43 | 23 | 13 | 9 | 6 |
| Expansion plug 70 mm | 000357 | 0.25 | 43 | 23 | 13 | 9 | 6 |
| Eye bolt 12 mm x 120 mm | 000359 | 1.20 | 43 | 23 | 13 | 9 | 6 |
| Total price in € | – | – | 853.55 | 456.55 | 258.05 | 178.65 | 119.10 |
| Total weight (kg) | – | – | 169.00 | 90.00 | 51.00 | 35.00 | 24.00 |
| ADDITIONAL EQUIPMENT | | | | | | | |
| Extra charge € access hatches (plywood) * | 000492 | 252.00 | | | | | |
| Total price in € | | | 514.40 | 514.40 | 514.40 | 514.40 | 514.40 |
| Extra charge € access hatches (aluminum) * | 000486 | 297.00 | | | | | |
| Total price in € | | | 694.40 | 694.40 | 694.40 | 694.40 | 694.40 |
| Extra charge € combi decks (plywood) ^{*1)} | 000483 | 134.30 | | | | | |
| Total price in € | | | 1,744.00 | 872.00 | 523.20 | 261.60 | 109.00 |
| Extra charge € aluminum deck ^{*1)} | 006633 | 179.00 | | | | | |
| Total price in € | | | 8,896.00 | 4,448.00 | 2,668.80 | 1,334.40 | 556.00 |
| Extra charge € vertical frames (Aluminum) instead of steel | 000863 | 96.70 | | | | | |
| Total price in € | | | 5,510.40 | 2,822.40 | 1,747.20 | 940.80 | 672.00 |

* when using 4 access decks instead of 8 steel decks. ^{*1)} when using combi decks or aluminum decks instead of steel decks.

| Scaffold bay length 3.07 m Scaffold length (m) x Working height (m) Working surface | Article No. | List price € | 101.31 x 10.20 1,033 m ² | 52.19 x 10.20 532 m ² | 30.70 x 10.20 313 m ² | 15.35 x 10.20 157 m ² | 9.21 x 10.20 93.94 m ² |
|---|-------------|-----------------|---|--|--|--|---|
| BASIC EQUIPMENT | | | | | | | |
| Assembly frame 2.00 x 0.73 m steel | 000853 | 63.10 | 136 | 72 | 44 | 24 | 16 |
| Steel floor "OPTI-LINE" 3.07 m x 0.32 m | 006773 | 69.10 | 264 | 136 | 80 | 40 | 24 |
| Diagonal 3.07 m bay | 000553 | 32.40 | 28 | 16 | 8 | 4 | 4 |
| Back guard rail 3.07 m, twice | 000504 | 17.50 | 297 | 153 | 90 | 45 | 28 |
| Toe board 3.07 m | 000542 | 17.20 | 132 | 68 | 40 | 20 | 12 |
| End toe board 0.73 m | 000544 | 10.30 | 8 | 8 | 8 | 8 | 6 |
| Double end guard rail 0.73 m | 000530 | 28.40 | 6 | 6 | 6 | 6 | 4 |
| Guard rail post 0.73 m with deck fastening | 000867 | 36.20 | 32 | 16 | 9 | 4 | 3 |
| Top end guard rail post 0.73 m | 000865 | 65.00 | 2 | 2 | 2 | 2 | 2 |
| Base jack 0.60 m | 000320 | 15.00 | 68 | 36 | 22 | 12 | 10 |
| Horizontal brace 3.07 m | 000551 | 64.20 | 7 | 4 | 2 | 1 | 1 |
| Total price in € | – | – | 38,209.70 | 20,065.10 | 11,993.60 | 6,311.30 | 4,122.20 |
| Total weight (kg) | – | – | 10,815.50 | 5,654.10 | 3,364.50 | 1,748.70 | 1,129.10 |
| Price per m ² in € | – | – | 36.99 | 37.72 | 38.32 | 40.20 | 43.88 |
| ANCHORING | | | | | | | |
| Wall tie 0.60 m | 000241 | 12.00 | 36 | 20 | 13 | 8 | 5 |
| Standard coupler with collar nut A/F 19 | 000326 | 6.40 | 36 | 20 | 13 | 8 | 5 |
| Expansion plug 70 mm | 000357 | 0.25 | 36 | 20 | 13 | 8 | 5 |
| Eye-Bolt 12 mm x 120 mm | 000359 | 1.20 | 36 | 20 | 13 | 8 | 5 |
| Total price in € | – | – | 853.55 | 456.55 | 258.05 | 178.65 | 119.10 |
| Total weight (kg) | – | – | 147.00 | 82.00 | 53.00 | 33.00 | 20.00 |
| ADDITIONAL EQUIPMENT | | | | | | | |
| Extra charge € access hatches (plywood) * | 000494 | 288.00 | | | | | |
| Total price in € | | | 599.20 | 599.20 | 599.20 | 599.20 | 599.20 |
| Extra charge € access hatches (aluminum) | 000488 | 332.00 | | | | | |
| Total price in € | | | 775.20 | 775.20 | 775.20 | 775.20 | 775.20 |
| Extra charge € combi decks (plywood) * ¹⁾ | 000484 | 159.00 | | | | | |
| Total price in € | | | 2,745.60 | 1,414.40 | 832.00 | 416.00 | 249.60 |
| Extra charge € aluminum deck * ¹⁾ | 006634 | 203.00 | | | | | |
| Total price in € | | | 8,553.60 | 4,406.40 | 2,592.00 | 1,296.00 | 777.60 |
| Extra charge € vertical frames (aluminum) instead of steel | 000863 | 96.70 | | | | | |
| Total price in € | | | 4,569.60 | 2,419.20 | 1,478.40 | 806.40 | 537.60 |

* when using 4 access decks instead of 8 steel decks. *¹⁾ when using combi decks or aluminum decks instead of steel decks.



MJ-Gerüst GmbH

Ziegelstraße 68 | 58840 Plettenberg

Telephone: +49 2391 8105 350

info@mj-geruest.de | www.mj-geruest.de

Company:

Name of buyer

Customer no. (if applicable)

☐ Order ☐ Inquiry

| Product description | Article no. | Quantity | Unit price / € | Total value / € |
|---------------------|-------------|----------|----------------|-----------------|
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

All prices exclude VAT applicable at the time of shipment. All dimensions and weights are non-binding approximate values.
Technical data is subject to change without prior notice. Prices are charged as applicable on the day of shipment.
Sale is subject exclusively to our sales terms and delivery conditions. In brief: Place of business and jurisdiction is Plettenberg.
Extended reservation of property rights until full payment of all our outstanding accounts are received. Our prices are ex works.

Order value / €

Shipping address:

Date of delivery

Shipping method

Terms of delivery

Packaging costs

Other

Terms of payment

MJ consultant


Customer signature

Copy this form and fax to +49 2391 8105 375



MJ-GERÜST
Scaffolding Systems

Also in your vicinity

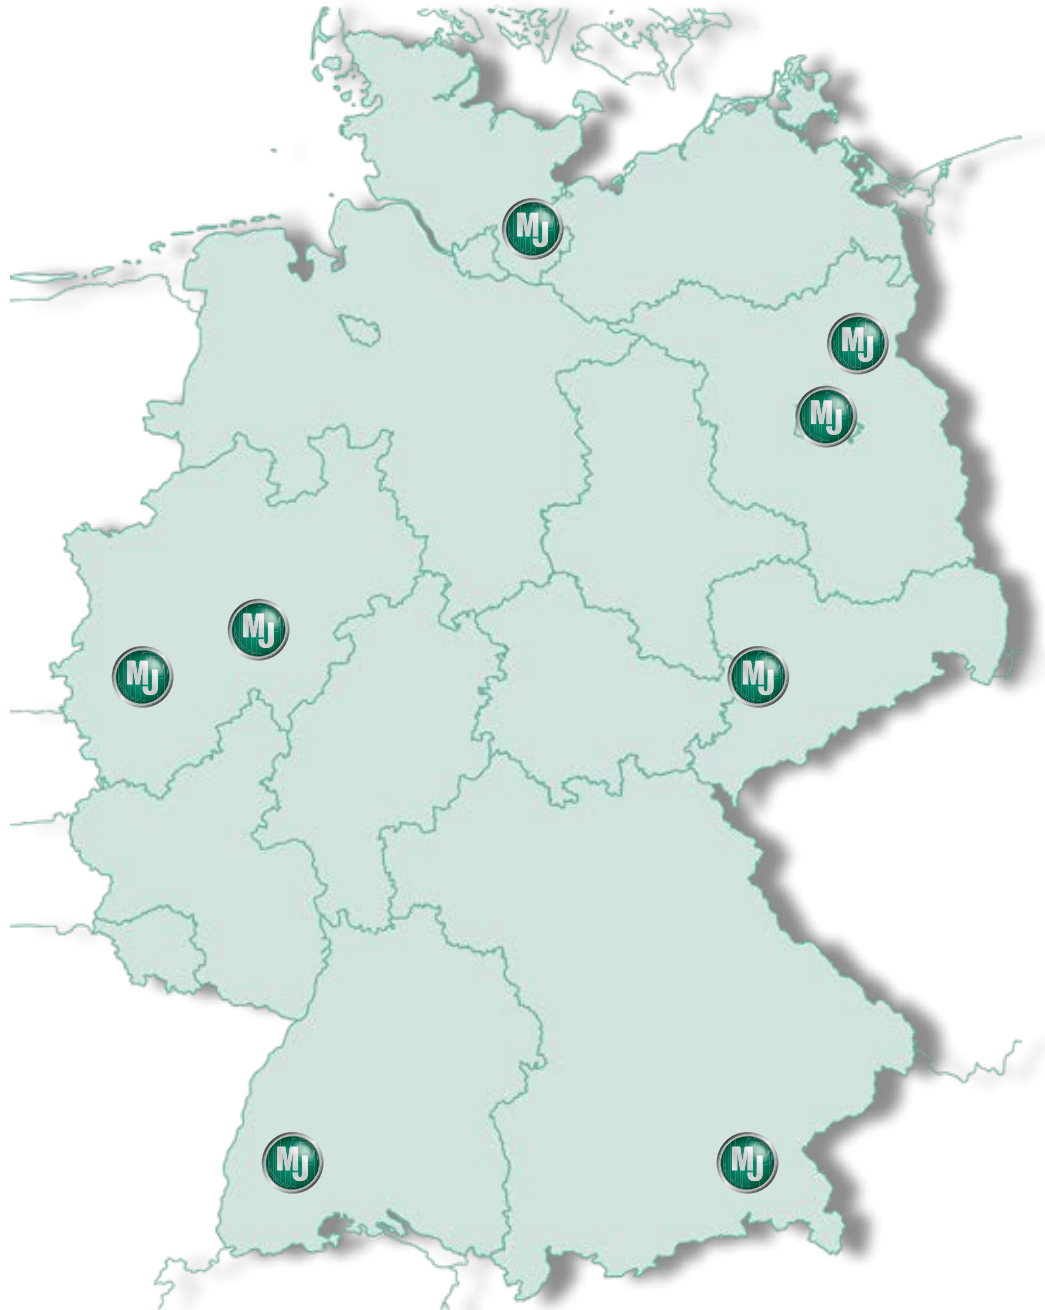

Head office / Production site

MJ-Gerüst GmbH
Ziegelstraße 68
58840 Plettenberg
Mon – Thu: 8:00 a.m. – 4:30 p.m.
Fri: 8:00 a.m. – 4:00 p.m.
Tel.: +49 2391 8105 350

MJ-Warehouse Burgenlandkreis
on the grounds of
Rainer Deike
Beuditzer Berg 4
06618 Naumburg - Meyhen
Mon – Fri: 8:00 a.m. – 5:00 p.m.
Tel.: +49 34466 20361

MJ-Warehouse Berlin
on the grounds of
Menke Gerüstbau GmbH
Roedernallee 9
13407 Berlin
Mon – Fri: 7:00 a.m. – 3:00 p.m.
Tel.: +49 30 4145631

MJ-Warehouse Kenzingen
on the grounds of
Himmelsbach Leitern- und Gerüstefabrik GmbH
Freiburger Straße 28
79341 Kenzingen
Mon – Thu: 8:00 a.m. – 5:30 p.m.
Fri: 8:00 a.m. – 4:00 p.m.
Tel.: +49 7644 91120

MJ-Warehouse Eberswalde
Poratzstraße
16225 Eberswalde
Nov – Feb: 7:30 a.m. – 3:30 p.m.
Mar – Oct: 7:00 a.m. – 4:00 p.m.
Tel.: +49 3334 589070

MJ-Warehouse Hamburg
on the grounds of
Richard Dubiec Gerüstbau GmbH
Liebigstraße 107
22113 Hamburg
Mon – Fri: 8:00 a.m. – 6:00 p.m.
Tel.: +49 40 218806

MJ-Warehouse Cologne
on the grounds of
Odendahl + Feldbusch GmbH
Robert-Bosch-Straße 53 - 55
50769 Cologne
Mon – Fri: 7:00 a.m. – 5:00 p.m.
Tel.: +49 221 9704190

MJ-Warehouse Ramerberg
on the grounds of
Sebastian Riedl Baugeräte/Schalung
Anger 1c
83561 Ramerberg
Mon – Fri: 5:30 a.m. – 5:00 p.m.
Tel.: +49 8039 409 360