




MJ-GERÜST
Scaffolding Systems

Stark gerüstet.

valid
from 15.06.2018

Facade Scaffolding UNI TOP Prices

English

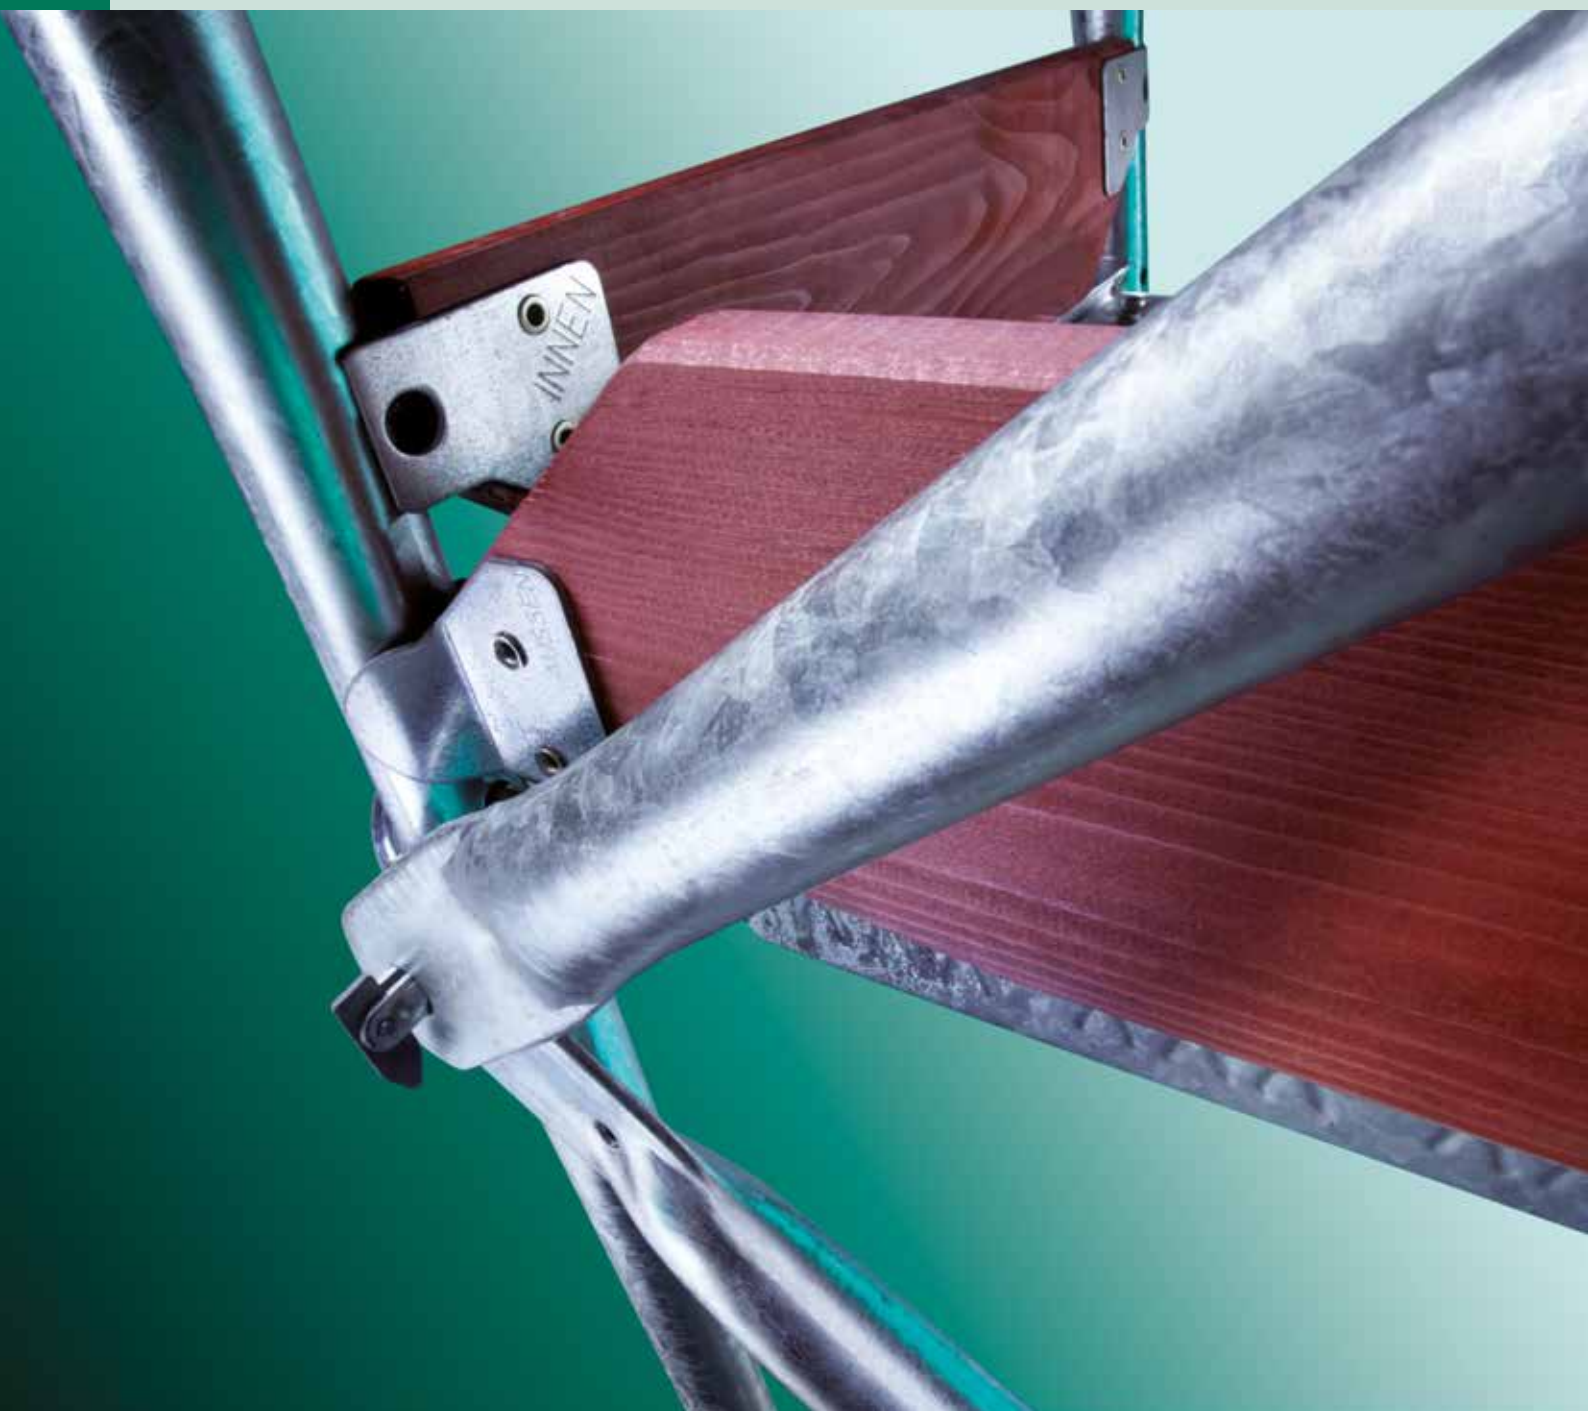

Contents

| | |
|---|----------|
| Contents Mission statement Benefits of the system | 2 - 3 |
| Benefits of the system | 4 - 5 |
| Frames | 6 - 7 |
| Decks | 8 - 9 |
| Stairs Accessories for stairs Gap covers | 10 |
| Scaffold access -inside- Couplers Base jacks | 11 |
| Transoms | 12 |
| Side guards | 13 |
| Upper scaffold guard rails | 14 |
| Brackets | 15 |
| Scaffold end Scaffold expansion | 16 |
| Protective scaffolding Deck fastenings | 17 |
| Transoms Side guards | 18 |
| Couplers | 19 |
| Anchoring | 20 |
| Scaffold pallets | 21 |
| Protective equipment | 22 - 25 |
| Scaffold examples | 26 - 27 |
| Notes | 28 - 30 |
| Fax order form | 31 |
| MJ-Gerüst external warehouses in Germany | Backpage |

Prices marked with an asterisk are net prices.

Discounts / deductions cannot be granted for these prices.

All prices exclude VAT applicable at the time of shipment. All dimensions and weights are non-binding approximate values. Technical data is subject to change without prior notice. Prices are charged as applicable on the day of shipment. Sale is subject exclusively to our sales terms and delivery conditions. In brief: Place of business and jurisdiction is Plettenberg. Extended reservation of property rights until full payment of all our outstanding accounts receivables. Our prices are ex works.




MJ UNI TOP: easy - fast - safe

The facade scaffolding system MJ UNI TOP meets the requirements of the national technical approval of the Deutsches Institut für Bautechnik Berlin (German Centre of Competence for Construction) Z-8.1-902*.


By connecting the individual scaffold bays with decks which are placed on the bolts in the vertical frames, the system can be assembled in virtually no time. This also rules out the risk of the decks slipping. This offers users a high degree of safety. The swivel pins in the vertical frames are used to fasten guard rails and diagonal braces without the use of tools.

The scaffolding system UNI TOP can be used according to DIN 4420-1:1990 for scaffolding groups 1 - 3 (which correspond to load classes 1-3 under DIN EN 12811-1) with bay widths $l \leq 3.0\text{m}$, and as guard and roof guard scaffolds. In addition, the use of a roof guard is accounted for in this design in compliance with the standard.


Due to its extensive and functionally aligned accessories, the system is able to achieve a degree of flexibility that also enables scaffolding for challenging objects.




Efficient
due to optimised ease of assembly




Cost-effective
due to long service life and excellent intrinsic value



Safe
because of technical approval Z-8.1-902



Flexible
due to innumerable bay lengths and widths



Strong
up to 6 kN/m^2 full surface,
up to 10 kN/m^2 as partial surface load

MJ-Gerüst – top-quality scaffolding "Made in Plettenberg"

MJ-Gerüst GmbH, with its head office in Plettenberg in the German province of Sauerland, is part of a strong group of companies that looks back on 50 years of company history. The core competence of the family business lies in the production and worldwide sale of high-quality scaffolding systems made of steel or aluminum that offer virtually infinite possibilities in terms of modern system scaffolding.

Reasons for you to become our partner:

- We manufacture our products in Germany.
- We are DIN EN 9001, 14001 and 50001 certified.
- We ensure the very highest product quality with dynamic quality management.
- Due to our extensive storage capacities and short decision-making paths, we ensure short-term material availability.
- We support you with your projects as early as the planning phase.
- We ensure global on-time shipment.



*Further details can be found in the approval letters and certifications which we would be pleased to send to you upon request.



MJ-GERÜST
Scaffolding Systems





Set up the base jacks, attach base transom, mount guard rails (only in the diagonal bay).



Mount vertical frames.



Mount diagonal brace via swivel pins.



Mount decks, align scaffold bay perpendicularly to guard rail and frame using spirit level.



Mount inside access deck.




Assemble vertical frames and decks of the next level, then mount diagonals, guard rails and toe boards.

Essential benefits of the system UNI TOP at a glance:

- **Horizontal bracing** through peg/deck locking mechanism
- **Short assembly times** without the use of any additional tools
- **High safety features:** Decks are firmly locked to the vertical frames. Inherent and vertical moving loads are discharged directly by the decks lying on the vertical frames.
- **No "tripping hazards"** on the deck level caused by protruding parts: The vertical frames are equipped with special "T profiles".
- **Independent perpendicular adjustment** through fixed knot connections: After the initial alignment, the alignment of all further scaffold levels takes place automatically.
- **Maximum work surface** due to outside diagonal braces
- **Decks** made of timber, steel and aluminum

With our extensive range of special components, the UNI TOP system can be implemented very flexibly. One such case is the vertical frame for roof overhangs, with which building protrusions can also be retrofitted.

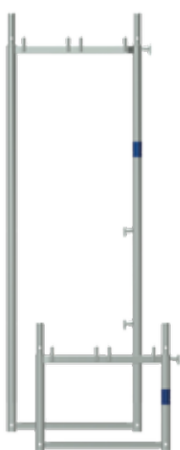

VERTICAL FRAME STEEL

Steel tube Ø 48.3 mm, hot dip galvanized, with bolts for attaching 2 floors.

In order to secure the joints by means of security pins, the posts are perforated in the upper and lower areas.

PU: 50 pieces (height 0.50 - 1.00 m)
25 pieces (height 2.00 m)



| Height m | Width m | Weight approx. kg | Article No. | Price Euro |
|-------------|------------|----------------------|----------------|---------------|
| 0.50 | 0.65 | 8.50 | 001021 | 60.40 |
| 1.00 | 0.65 | 12.00 | 001020 | 65.50 |
| 2.00 | 0.65 | 16.50 | 001019 | 71.90 |

INDIVIDUAL NEEDLE EMBOSING



– 3.90



VERTICAL FRAME STEEL

as above, but for mounting only one board.

PU: 25 pieces

| | | | | |
|------|------|-------|--------|-------|
| 2.00 | 0.40 | 16.30 | 001173 | 73.80 |
|------|------|-------|--------|-------|




VERTICAL FRAME ALU

Aluminum tube Ø 48.3 mm, otherwise like steel model.

PU: 25 pieces

| | | | | |
|------|------|------|--------|--------|
| 2.00 | 0.65 | 9.00 | 001035 | 105.60 |
|------|------|------|--------|--------|

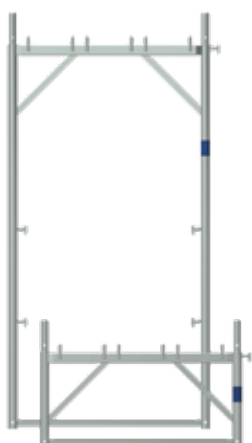

VERTICAL FRAME STEEL

Steel tube Ø 48.3 mm, hot dip galvanized, with bolts for attaching 3 floors. In order to secure the joints by means of security pins, the posts are perforated in the upper and lower areas. The assembly frame UNI TOP 100 meets the requirements of width class A/F 09 and is designed for highly loaded scaffoldings up to load class 6.

PU: 50 pieces (height 0.50 - 1.00 m)
25 pieces (height 2.00 m)

| | | | | |
|------|------|-------|--------|-------|
| 0.50 | 1.00 | 12.50 | 001030 | 71.80 |
| 1.00 | 1.00 | 15.00 | 001027 | 75.30 |
| 2.00 | 1.00 | 22.50 | 001026 | 97.30 |




VERTICAL FRAME FOR ROOF OVERHANGS
Steel tube Ø 48.3 mm, hot dip galvanized,
for retrofitting roof overhangs.
PU: 25 pieces

| Height m | Width m | Weight approx. kg | Article No. | Price Euro |
|-------------|------------|----------------------|----------------|---------------|
| 2.00 | 0.65 | 20.50 | 001024 | 107.50 |
| 2.00 | 1.00 | 24.00 | 001025 | 134.90 |



CONVERSION FRAME
Steel tube Ø 48.3 mm, hot dip galvanized,
for converting a 3-board frame
into a 2-board frame.
PU: 25 pieces

| | | | | |
|------|-----------|-------|--------|--------|
| 2.00 | 1.00/0.65 | 21.40 | 007889 | 110.00 |
|------|-----------|-------|--------|--------|

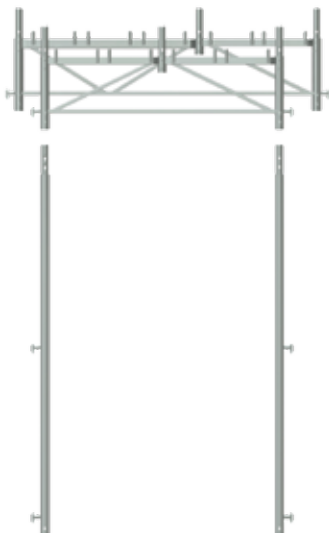

WALK-THROUGH FRAME TRUSS BEAM
Steel tube Ø 48.3 mm, hot dip galvanized,
with tube connector.

4-board
5-board

| | | | | |
|---|------|-------|--------|--------|
| – | 1.35 | 15.90 | 001090 | 124.00 |
| – | 1.65 | 18.90 | 001091 | 144.00 |

WALK-THROUGH FRAME POSTS
Steel tube Ø 48.3 mm, hot dip galvanized,
each with 2 machine screws
fitting the walk-through frame truss beam.

| | | | | |
|------|---|------|--------|-------|
| 2.00 | – | 7.50 | 000046 | 38.00 |
|------|---|------|--------|-------|



BOLT-ON SWIVEL PIN
for attaching to the vertical
frames for mounting
a guard rail.



| | | | | |
|---|---|------|--------|------|
| – | – | 0.10 | 000169 | 3.50 |
|---|---|------|--------|------|


TIMBER DECK

with galvanized deck caps, 48 mm thick, can be used on both sides, mechanically checked in accordance with DIN EN 14801 and DIN 4074 MS 10/13, waterproofed and weatherproof, can be used in guard and roof guard scaffolds as per DIN 4420 up to $L \leq 2.50$ m.

PU: 80 pieces



| Load class | Length m | Width m | Weight approx. kg | Article No. | Price Euro |
|------------|----------|---------|-------------------|-------------|------------|
| 6 | 0.65 | 0.29 | 5.00 | 001076 | 29.10 |
| 6 | 1.00 | 0.29 | 7.50 | 001075 | 33.50 |
| 6 | 1.50 | 0.29 | 10.50 | 001074 | 39.00 |
| 5 | 2.00 | 0.29 | 14.00 | 001073 | 46.10 |
| 4 | 2.50 | 0.29 | 17.00 | 001072 | 53.10 |
| 3 | 3.00 | 0.29 | 21.50 | 001071 | 59.20 |

STEEL DECK

Hot dip galvanized, optimum stackability due to the selected cross-section shape.

PU: 80 pieces



| | | | | | |
|---|------|------|-------|--------|-------|
| 6 | 0.65 | 0.29 | 5.50 | 001110 | 47.20 |
| 6 | 1.00 | 0.29 | 7.50 | 001111 | 49.20 |
| 6 | 1.50 | 0.29 | 11.50 | 001112 | 55.40 |
| 6 | 2.00 | 0.29 | 15.00 | 001113 | 63.60 |
| 5 | 2.50 | 0.29 | 17.50 | 001114 | 69.70 |
| 4 | 3.00 | 0.29 | 21.50 | 001115 | 80.00 |

ALU DECK WITH ALU HEAD PIECE

Extremely robust model, can be used on both sides, with high load capacity and non-slip surface, minimal deflection.

PU: 80 pieces



| | | | | | |
|---|------|------|-------|--------|--------|
| 6 | 1.00 | 0.29 | 4.00 | 001116 | 65.00 |
| 6 | 1.50 | 0.29 | 5.80 | 001117 | 81.50 |
| 6 | 2.00 | 0.29 | 7.60 | 001118 | 99.40 |
| 5 | 2.50 | 0.29 | 9.50 | 001119 | 117.90 |
| 4 | 3.00 | 0.29 | 11.50 | 001120 | 132.20 |
| 3 | 4.00 | 0.29 | 15.00 | 001121 | 173.20 |

FULL ALU ACCESS DECK + ALU LADDER

OVERALL HEIGHT approx. 73 mm

with non-slip aluminum decking, weather resistant, lightweight and robust.

PU: 14 pieces

Stable flap!



| | | | | | |
|---|------|------|-------|--------|--------|
| 4 | 2.00 | 0.60 | 22.50 | 009456 | 278.00 |
| 4 | 2.50 | 0.60 | 22.90 | 003706 | 282.00 |
| 3 | 3.00 | 0.60 | 25.90 | 003707 | 315.00 |

INDIVIDUAL NEEDLE EMBOSING


— 3.90

ALU-DECKS WITH STEEL CAPS

Slip-resistant and easy to stack, optimized ratio of weight and loading capacity by computerized profile optimization, due to steel head pieces very robust and durable. Patented holm reinforcements in the walking area for minimal deflection and maximum slip resistance.

VE: 18 pieces

NEW


| Load class | Length m | Width m | Weight approx. kg | Article No. | Price Euro |
|------------|----------|---------|-------------------|-------------|------------|
| 6 | 0.65 | 0.59 | 6.50 | 008190 | 115.00 |
| 6 | 1.00 | 0.59 | 8.70 | 008191 | 129.00 |
| 6 | 1.50 | 0.59 | 11.90 | 008192 | 159.00 |
| 6 | 2.00 | 0.59 | 15.10 | 008193 | 176.00 |
| 5 | 2.50 | 0.59 | 18.30 | 008194 | 189.00 |
| 4 | 3.00 | 0.59 | 21.50 | 008195 | 228.00 |

DECK CONNECTOR

Steel, hot dip galvanized, for connecting 2 alu decks, only required for 4.00 m alu decks.




| | | | | | |
|---|---|---|------|--------|------|
| — | — | — | 0.10 | 000311 | 8.50 |
|---|---|---|------|--------|------|

DECK FASTENING WITH WEDGE

Steel, hot dip galvanized, for preventing decks from lifting off.


BRACKET DECK FASTENING

Steel, hot dip galvanized, for preventing decks from lifting off.

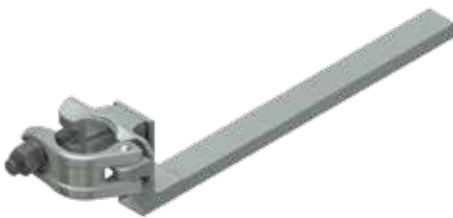

| | | | | | |
|---|---|---|------|--------|-------|
| — | — | — | 0.70 | 006850 | 11.00 |
|---|---|---|------|--------|-------|

| | | | | | |
|---|------|---|------|--------|-------|
| — | 0.40 | — | 1.50 | 007302 | 19.50 |
|---|------|---|------|--------|-------|




ALU STAIRS WITH PLATFORM

for bay height 2.00 and 1.00 m, scaffold stairway for the planned construction with facade scaffolding for quick and safe mounting of levels. The steps are designed in a non-slip manner and allow comfortable outside access for extensive use of scaffold and when transporting bulky material, without reducing the work surface in the main walkway.

- Evenly distributed line load $p=2.5\text{ kN/m}^2$
- Single load distributed on $0.2 \times 0.2\text{ m}^2$ $F=1.5\text{ kN}$
- Meets the requirements according to DIN EN 12811-1

PU: 10 pieces

Bay 2.50 m

Initial stairs
1.00 m

OUTSIDE STAIRCASE HANDRAIL

Steel, hot dip galvanized, for alu platform stairs.

PU: 40 pieces

Bay 2.50 m

INSIDE STAIRCASE HANDRAIL

Steel, hot dip galvanized, for alu platform stairs.

PU: 20 pieces

A/F 22

A/F 19

STAIR GUARD RAIL

Steel, hot dip galvanized, for alu stair with landing 1.00 m.

| Length m | Width m | Weight approx. kg | Article No. | Price Euro |
|-------------|------------|----------------------|----------------|---------------|
| 3.25 | 0.55 | 20.00 | 000394 | 397.00 |
| 1.50 | 0.55 | 11.20 | 007362 | 235.00 |
| 3.45 | — | 16.00 | 000426 | 112.00 |
| 2.25 | — | 11.50 | 006942 | 103.50 |
| 2.25 | — | 11.50 | 000425 | 103.50 |
| — | — | 6.90 | 009134 | 88.00 |

STEP ACCESS PLATFORM BRACKET



to set up a stairway with a scaffold bay.

| | | | | |
|------|------|------|--------|-------|
| 0.50 | 0.30 | 7.50 | 000234 | 74.00 |
|------|------|------|--------|-------|


GAP COVER*

Steel, hot dip galvanized, non-slip deck, varied use, bridges gap up to 0.25 m wide, quick assembly due to wedge lock.

| | | | | |
|------|------|------|--------|-------|
| 0.35 | 0.34 | 3.60 | 007794 | 32.00 |
| 0.60 | 0.34 | 5.60 | 008256 | 51.90 |


GUARD RAIL BRACKET FOR PLATFORM STAIRS*

A/F 19

| | | | | |
|------|---|------|--------|-------|
| 0.50 | — | 3.20 | 008227 | 36.90 |
|------|---|------|--------|-------|





Scaffold access -inside- | Couplers Base jacks



ACCESS LADDER ALU

as a separate ladder for the inside scaffold access, with riveted steel claws for safe attachment to the access decks.

Length
m

Width
m

Weight
approx. kg

Article
No.

Price
Euro

2.16

0.40

3.00

001323

52.00

ACCESS LADDER STEEL

as a separate ladder for the inside scaffold climbing, hot dip galvanized with hook for safe mounting to the access decks.

PU: 80 pieces

2.16

0.40

10.50

000172

47.90



SQUARE PLUG BLACK

for Access Ladder.

steel

0.20

0.40

0.01

008441

0.40

ALU

0.25

0.40

0.01

008442

0.40

DISTANCE COUPLER

Steel tube Ø 48.3 mm with two welded couplers, galvanized. Can be used, for example, as a connection (without a gap) between facade scaffolding and a pre-assembled stairway.

Inside
micrometer

0.11

1.60

008225

14.60

Inside
micrometer

0.15

1.80

008297

17.00

Inside
micrometer

0.18

2.00

000233

17.50

BASE JACK

Steel, hot dip galvanized, for adjusting level with differences in height of the ground, with tube spindle, base plate 150 x 150 mm, knurled nut with collar for centring the shaft on the jack, lock to prevent unscrewing of the knurled nut and to ensure the necessary bridging length, can also be used as a head jack.

PU: 375

0.30

2.40

000318

12.00

PU: 300

0.50

3.10

000319

14.50

PU: 300

0.60

3.40

000320

15.00

PU: 250

0.78

3.90

000321

19.90

PU: 200

1.00

4.70

000322

24.90

SWIVEL BASE JACK

with swivelling base plate 150 x 150 mm, additional longitudinal scaffold bracing required at the base, permissible load: 25.4kN.

PU: 250

0.50

3.10

000323

35.00

BASE JACK, SOLID

Steel, galvanized, for high permissible loads, with knurled nut, fast action thread, base plate 150 x 150 mm.

PU: 200

0.60

6.70

007095

32.20



ACCESS LADDER 1.00 m

Steel, hot-dip galvanized, with UT-suspension. Enables easy entry into the scaffolding, with a field height of 1.00 m.




1.00

0.62/
0.47

7.60

010407

75.50



ADJUSTMENT TUBE

Steel, hot dip galvanized with tube 41 mm, T-Head bolt and collar nut A/F 22. For levelling unequal ground. Use in connection with a decking transom and base jack. Adjustment range 10 x 0.10 m = 1.00 m.


—

1.70

5.80

000402

42.90



SPINDLE SECURITY

Serves for securing spindle feet when moving a scaffold. The attachment to the tube is done with a half coupler.


—

0.40

2.00

010294

20.90



PROTECTIVE PAD FOR BASE JACK

Plastic, with reflector.

—

—

—

008110

3.20



UNDERLAY WOODS

40 x 240 x 1000 mm +/- 10 mm

40 x 240 x 1500 mm +/- 10 mm

as a load-distributing support, sawn.

—

1.00

1.50

009203

7.50

—

1.50

2.25

010360



9.10

BASE TRANSOM



Steel, hot dip galvanized, is used to fasten lower diagonal brace.

**DECK TRANSOM**



Steel, hot dip galvanized.

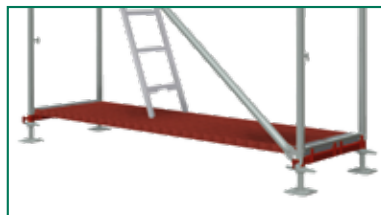**PLATFORM TRANSOM**

Steel, hot dip galvanized, designed for building a continuous platform level between the scaffolds without gaps.

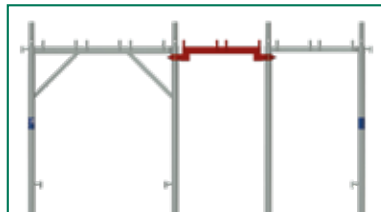**INTERMEDIATE TRANSOM**

Steel, hot dip galvanized. adjustable height.

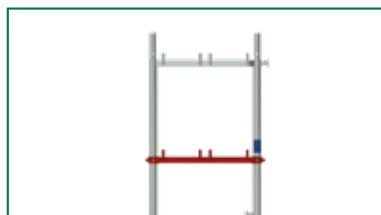**HANGING TRANSOM**

Steel, hot dip galvanized, for bridging up to a 6.00 m span and cantilevered end elevations up to 3.00 m.

**CONVERSION TRANSOM**

Steel, hot dip galvanized, with joint pins and diagonal swivel pin, enables system change from UNI TOP 100 to UNI TOP 65.



| | Length m | Weight approx. kg | Article No. | Price Euro |
|---------|-------------|----------------------|----------------|---------------|
| 2-board | 0.65 | 1.50 | 001044 | 14.90 |
| 3-board | 1.00 | 2.50 | 001045 | 16.50 |
| 2-board | 0.65 | 3.00 | 001082 | 32.10 |
| 3-board | 1.00 | 4.50 | 001083 | 41.50 |
| 1-board | 0.40 | 3.00 | 009638 | 35.20 |
| 2-board | 0.65 | 4.30 | 007578 | 40.90 |
| 3-board | 1.00 | 5.70 | 007579 | 53.90 |
| 2-board | 0.65 | 3.50 | 001086 | 36.20 |
| 3-board | 1.00 | 5.20 | 001087 | 49.40 |
| 2-board | 0.65 | 4.70 | 001088 | 40.40 |
| 3-board | 1.00 | 6.30 | 001089 | 52.10 |
| — | 1.00 | 13.40 | 001093 | 107.60 |

DIAGONAL BRACE

Steel tube Ø 48.3 mm, hot dip galvanized, the assembly takes place on the outside of the scaffold using the upper swivel pin on the vertical frame. Perpendicular scaffolding construction is guaranteed because the diagonal causes automatic alignment. Thus a lift-wise alignment is not required.
PU: 50 pieces



| Length m | Width m | Weight approx. kg | Article No. | Price Euro |
|----------------|------------|----------------------|----------------|---------------|
| for bay 1.50 m | — | 7.50 | 000082 | 23.00 |
| for bay 2.00 m | — | 8.00 | 000081 | 25.00 |
| for bay 2.50 m | — | 9.50 | 000080 | 27.00 |
| for bay 3.00 m | — | 11.00 | 000079 | 29.50 |
| for bay 4.00 m | — | 13.80 | 000231 | 39.00 |


GUARD RAIL

Steel tube Ø 38 mm (Ø 42.4 mm for 4.00 m length), hot dip galvanized, pressed and perforated at the ends, time-saving attachment because of the self-locking swivel pins, thus no tools are required for assembly.
PU: 100 pieces



| | | | | |
|------|---|-------|--------|-------|
| 0.65 | — | 1.50 | 001031 | 12.50 |
| 1.00 | — | 2.00 | 001033 | 13.00 |
| 1.50 | — | 2.50 | 000052 | 14.10 |
| 2.00 | — | 3.50 | 000050 | 15.00 |
| 2.50 | — | 4.00 | 000049 | 15.90 |
| 3.00 | — | 5.50 | 000048 | 16.90 |
| 4.00 | — | 11.80 | 000202 | 34.00 |


DOUBLE END GUARD RAIL

Steel tube Ø 33.7 mm, hot dip galvanized, double side guards. Connected on one side of the swivel pin and attached to the opposite side.
Please specify A/F width with your order!
PU: 25 pieces



| | | | | | |
|--------|---|------|------|--------|-------|
| A/F 19 | — | 0.65 | 3.00 | 001036 | 24.50 |
| A/F 22 | — | 0.65 | 3.00 | 006948 | 24.50 |
| A/F 19 | — | 1.00 | 4.00 | 001038 | 26.50 |

END GUARD RAIL 1-BOARD

Steel tube Ø 33.7 mm, hot dip galvanized. Double side protection on front sides. Can be used for side protection on round scaffolding.



| | | |
|------|--------|-------|
| 2.60 | 009366 | 20.70 |
|------|--------|-------|


TOP END GUARD FRAME


Steel tube Ø 48.3mm, hot dip galvanized, can be used for the top scaffold platform as double end side protection and for securing the decks.
PU: 25 pieces



| | | | | |
|------|------|-------|--------|-------|
| 1.00 | 0.65 | 11.50 | 001046 | 55.20 |
| 1.00 | 1.00 | 13.50 | 001047 | 59.30 |

TOE BOARD

Impregnated timber with galvanized fittings, for insertion between the frames.
PU: 70 pieces

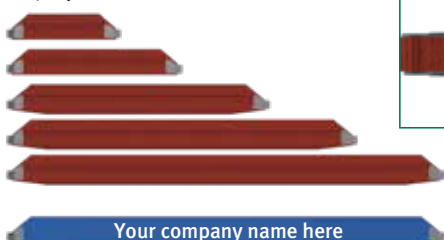






| | | | | |
|------|-------|-------|--------|-------|
| 0.65 | 0.145 | 2.00 | 001109 | 13.40 |
| 1.00 | 0.145 | 2.50 | 001108 | 14.40 |
| 1.50 | 0.17 | 3.00 | 001107 | 15.70 |
| 2.00 | 0.17 | 5.00 | 001106 | 17.20 |
| 2.50 | 0.17 | 5.50 | 001105 | 18.60 |
| 3.00 | 0.17 | 6.50 | 001104 | 20.60 |
| 4.00 | 0.17 | 10.00 | 002616 | 29.00 |

Your company name here

 Prices for printed
 toe boards on request.



| | | Length m | Width m | Weight approx. kg | Article No. | Price Euro |
|---|---|----------------|------------|----------------------|----------------|---------------|
|  | GUARD RAIL POST Steel tube Ø 48.3 mm, hot dip galvanized, with fastening screw, for mounting guard rail on the top scaffold level, with welded steel brackets to stabilise decks, for bracket with tube connector 0.30 m wide. PU: 50 pieces | 1.05 | — | 4.20 | 001048 | 21.30 |
| | | | | | | |
|  | GUARD RAIL POST WITH TRANSOM Steel tube Ø 48.3 mm, hot dip galvanized, with fastening screw, for mounting guard rails and securing the top deck. PU: 50 pieces | 1.00 | 0.65 | 5.50 | 001050 | 32.80 |
| | | 1.00 | 1.00 | 7.00 | 001051 | 34.60 |
|  | GUARD RAIL FOR PROTECTIVE NET Steel tube 48.3 mm, hot dip galvanized, with fastening screw, for bracket with tube connector 0.30 m wide. Not suitable for roof guard scaffolds. PU: 50 pieces | 1.60 | — | 6.00 | 001153 | 29.60 |
| | | 2.00 | — | 9.00 | 001185 | 41.50 |
|  | GUARD RAIL POST FOR ROOF RAIL WITH TRANSOM Steel tube Ø 48.3 mm, hot dip galvanized, with fastening screw, use in vertical frames 0.65 and 1.00 m, for securing the decking on the top scaffold platform and fastening side protective nets. Also suitable for attachment of protective side nets in conjunction with guard rails. Approved for use in guard and roof guard scaffolds as per DIN 4420. PU: 50 pieces | 2.00 | 0.65 | 11.00 | 001145 | 64.90 |
| | | 2.00 | 1.00 | 12.50 | 001146 | 68.20 |
|  | REINFORCEMENT FOR ROOF RAIL Steel, hot-dip galvanized, to reinforce the guard rail for roof rail, at one field length over 3.07 m. | A/F 22 1.30 | — | 7.50 | 010063 | 42.80 |



COUPLER BRACKET WITHOUT TUBE CONNECTOR

Steel, hot dip galvanized, with welded half coupler, to expand the scaffold by 0.30 m.
PU: 100 pieces

| | Width m | Weight approx. kg | Article No. | Price Euro |
|--------|------------|----------------------|----------------|---------------|
| A/F 22 | 0.30 | 3.00 | 006944 | 30.60 |
| A/F 19 | 0.30 | 3.00 | 001053 | 30.60 |



COUPLER BRACKET WITH TUBE CONNECTOR

Steel, hot dip galvanized, with welded half coupler, used to expand the scaffold by 0.30 m and with tube connector for mounting guard rail post.
PU: 20 pieces


| | | | | |
|--------|------|------|--------|-------|
| A/F 22 | 0.30 | 4.20 | 006943 | 33.50 |
| A/F 19 | 0.30 | 4.20 | 001052 | 33.50 |



HOP-UP BRACKET 2-BOARD

Steel, hot dip galvanized, with half couplers, to widen the inside and outside of the scaffold by 1.00 m and to extend the ends. When extending scaffold on hop-up brackets, please request load tables.
PU: 20 pieces

| | | | | |
|--------|------|------|--------|-------|
| A/F 22 | 0.65 | 7.60 | 006950 | 58.80 |
| A/F 19 | 0.65 | 7.60 | 001054 | 58.80 |



FRAME BRACKET 2-BOARD

Steel, hot dip galvanized, with half couplers. The frame bracket is used to make scaffold lift adaptations of one frame width. Unlike the hop-up bracket, the adaptation is not only possible at the standard decking height, but can be made at any required height. This makes it possible to optimally adjust the scaffold to the shape of the building. 2-board model for vertical frame UNI TOP 65.
PU: 20 pieces


| | | | | |
|--------|------|------|--------|-------|
| A/F 19 | 0.65 | 9.10 | 001056 | 74.80 |
|--------|------|------|--------|-------|



SYSTEM GRID BRACKET 0.50 m

Steel, hot dip galvanized, with half coupler, to expand or shorten scaffold bays.


| | | | | |
|--------|------|------|--------|-------|
| A/F 22 | 0.50 | 6.00 | 007129 | 45.00 |
|--------|------|------|--------|-------|

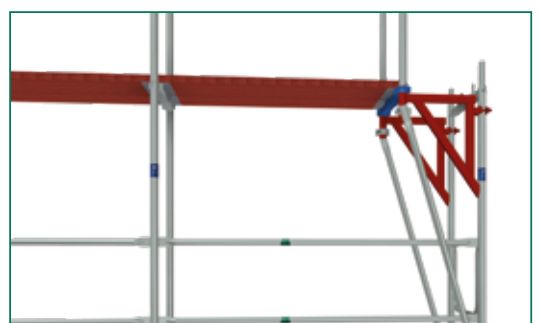

HOP-UP BRACKET 3-BOARD

Steel, hot dip galvanized, with two half couplers, to expand the inside and outside of the scaffold by 1.00 m and to extend the ends, bracket \leq load class 3. Must only be installed with cross diagonal to support the bracket. Stability of the supporting structure must be verified in each individual case.

PU: 20 pieces

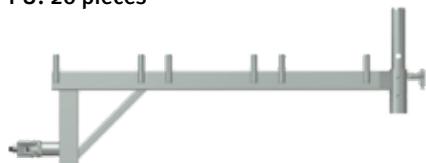


| Length m | Width m | Weight approx. kg | Article No. | Price Euro |
|-------------|------------|----------------------|----------------|---------------|
|-------------|------------|----------------------|----------------|---------------|

| | | | | |
|---|------|-------|--------|-------|
| — | 1.00 | 15.00 | 001055 | 74.50 |
|---|------|-------|--------|-------|


SUPPORTING CONSOLE 3-BOARD HEAVY VERSION

Steel, hot dip galvanized, with two half-couplers, to widen or shorten the bay size by 1.00 m. Extended tube connector enables the use of a starting transom (See figure). Console \leq Load Class 3. To support the console use a support diagonal. Stability of the supporting structure must be proven in each individual case.

PU: 20 pieces

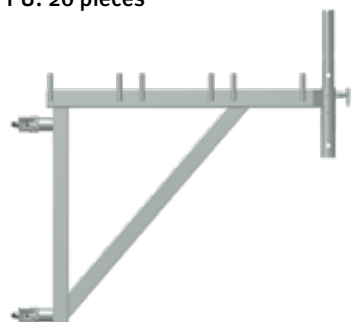

| | | | | |
|---|------|-------|--------|-------|
| — | 1.00 | 11.40 | 009076 | 89.50 |
|---|------|-------|--------|-------|

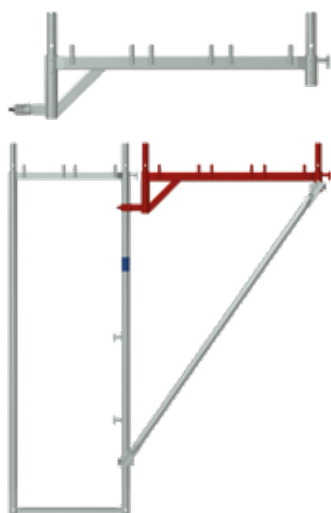
FRAME BRACKET 3-BOARD



Model as above, but with tube connector for further construction with a 3-board steel vertical frame. The frame bracket is used to make scaffold lift adaptations of one frame width. Must only be installed with cross diagonal for support. Stability of the supporting structure must be verified in each individual case.

PU: 20 pieces

| | | | | |
|---|------|------|--------|-------|
| — | 1.00 | 8.00 | 001058 | 84.40 |
|---|------|------|--------|-------|

T-DECKING FASTENER

Coated, signal red RAL 3001.
As a safe guard against taking off.



| | | | | |
|---|------|------|--------|------|
| — | 0.30 | 0.80 | 009518 | 3.90 |
|---|------|------|--------|------|





COTTER PIN

for fixing the T-deck fastener.



| | | | | |
|---|---|------|--------|------|
| — | — | 0.01 | 002232 | 0.40 |
|---|---|------|--------|------|

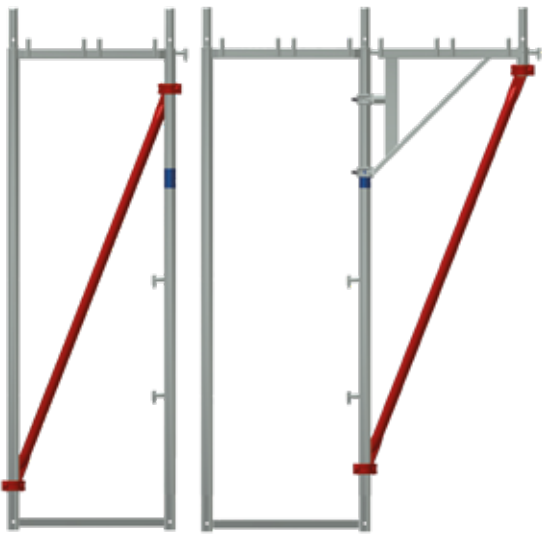
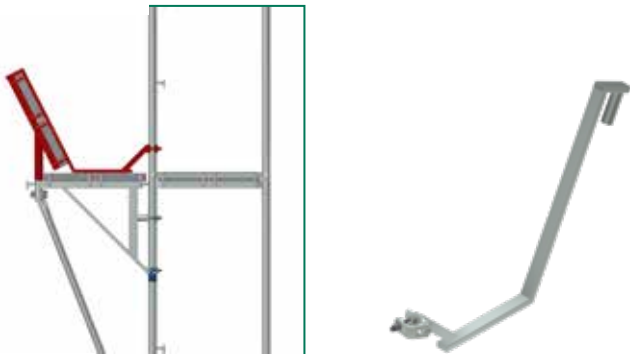
| | | Length m | Width m | Weight approx. kg | Article No. | Price Euro |
|---|--|-------------|------------|----------------------|----------------|---------------|
|  | CROSS DIAGONAL Steel, hot dip galvanized, with two half couplers for bracing 2-board vertical frame perpendicular to the facade and for supporting 2-board brackets. | 1.77 | – | 5.30 | 000588 | 37.70 |
| | CROSS DIAGONAL as above, but for bracing 3-board vertical frame and for supporting 3-board brackets. | 1.95 | – | 5.80 | 000587 | 39.60 |
|  | | – | 0.65 | 3.00 | 002240 | 23.80 |
|  | ROOF GUARD EXTENSION Steel, hot dip galvanized, provides protection from falling objects in conjunction with 2-board and/or 3-board hop-up brackets. The surfaces are to be designed with system floors made of wood, steel or aluminum. | – | – | 3.00 | 001180 | 34.90 |
| | DECK FASTENING FOR ROOF GUARD EXTENSION Steel, hot dip galvanized, Installation in conjunction with hop-up bracket. | – | – | 4.00 | 001171 | 39.90 |
|  | | | | | | |



DECKING RAIL

Steel, hot dip galvanized. Placed on lattice beams or tubes and covered with system decks. Guarantees smooth deck surface for deck scaffolds.

Please specify A/F width with your order!



LATTICE BEAM BASE PLATE

Steel, hot dip galvanized, use in connection with a decking transom for further extensions of scaffold pattern when bridging with lattice beams.

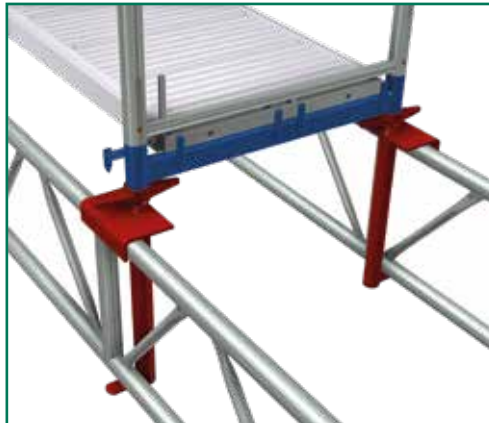
INSIDE GUARD RAIL POST

Steel, hot dip galvanized with 2 welded-on swivel pins for attaching additional inside back guard rails to the vertical frame.

PU: 100 pieces

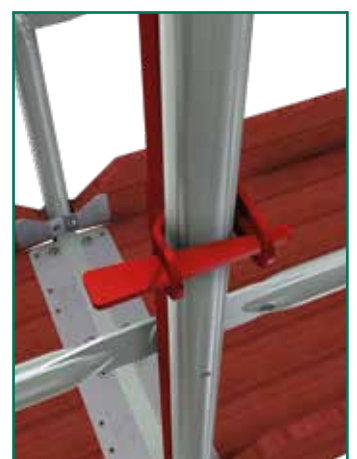


| | Length m | Weight approx. kg | Article No. | Price Euro |
|---|-------------|----------------------|----------------|---------------|
| 1-board | 0.35 | 2.70 | 002618 | 39.10 |
| 2-board | 0.65 | 3.70 | 000971 | 41.20 |
| 3-board | 1.00 | 4.40 | 000972 | 45.10 |
| 4-board | 1.50 | 6.50 | 000973 | 64.00 |
| 6-board | 2.00 | 7.60 | 000974 | 84.10 |
| 8-board | 2.50 | 9.40 | 000975 | 108.30 |
| Special lengths on request! | | | | |
| — | — | 6.00 | 000235 | 68.10 |
| Special couplers, see price list "Universal Accessories". | | | | |
| — | 0.95 | 2.40 | 007735 | 31.00 |



STANDARD COUPLER

Steel, drop-forged, hot dip galvanized. Robust model, for right-angled connection of tubes of Ø 48.3 mm, class BB, EN 74-1 RA BB C3 M, to be used in the classes B and BB of the steel and alu tube. Alternatively, with quick release thread* according to the general building approval.

PU: 25 pieces

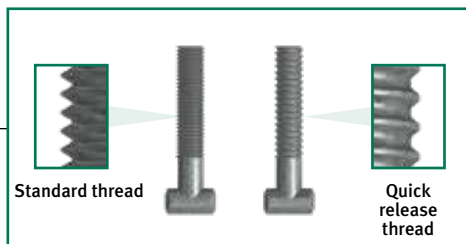

| | Weight approx. kg | Article No. | Price Euro |
|--------|-------------------|-------------|------------|
| A/F 22 | 1.15 | 000325 | 6.40 |
| A/F 19 | 1.15 | 000326 | 6.40 |

with quick release thread

| | | | |
|---------|------|--------|------|
| A/F 22* | 1.15 | 007521 | 6.90 |
| A/F 19* | 1.15 | 007523 | 6.90 |

| | | | |
|--------|------|--------|------|
| A/F 22 | 1.35 | 000328 | 6.80 |
| A/F 19 | 1.35 | 000329 | 6.80 |

with quick release thread

| | | | |
|---------|------|--------|------|
| A/F 22* | 1.35 | 007522 | 7.30 |
| A/F 19* | 1.35 | 007524 | 7.30 |



SWIVEL COUPLER

Heavy-duty steel model, ribbed, hot dip galvanized, for any angular connection of tubes of Ø 48.3 mm, class B, EN 74-1 SW B C3 M, to be used in class B of the steel and alu tube.

Alternatively, with quick release thread* according to the general building approval.

PU: 25 pieces

| | | | |
|--------|------|--------|-------|
| A/F 22 | 3.60 | 003247 | 36.20 |
| A/F 19 | 3.60 | 004591 | 36.20 |



BASIC COUPLER


T-carrier plate with two parallel welded half couplers to bear vertical loads of scaffold constructions, to be mounted directly on the facade, basic structural analysis available. Extensive lattice beam constructions are no longer necessary.







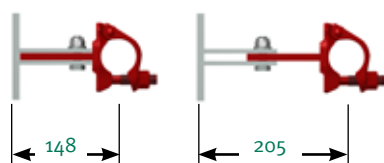

| | | | |
|--------|------|--------|-------|
| A/F 22 | 5.00 | 009137 | 52.10 |
|--------|------|--------|-------|










BASIC COUPLER ADJUSTABLE

as above but adjustable for wall distances from 148 - 205 mm, with 4 mounting holes.

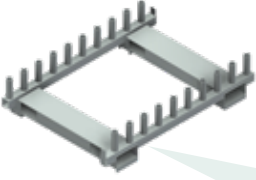

| | | | PU | Length m | Weight approx. kg | Article No. | Price Euro |
|---|--|---|-----|-------------|----------------------|----------------|---------------|
|  | WALL TIE Steel tube Ø 48.3 mm, hot dip galvanized. Installation as short scaffold tie with one standard coupler, as long scaffold tie with two standard couplers. | | — | 0.30 | 1.40 | 000240 | 9.35 |
| | | | — | 0.40 | 1.80 | 000242 | 9.75 |
| | | | — | 0.50 | 2.00 | 000125 | 10.00 |
| | | | — | 0.60 | 2.60 | 000241 | 12.00 |
| | | | — | 0.80 | 3.20 | 000129 | 13.20 |
| | | | — | 1.00 | 3.80 | 000127 | 14.20 |
| | | | — | 1.30 | 4.80 | 000131 | 17.50 |
| | | | — | 1.50 | 5.50 | 000132 | 18.60 |
|  | WALL TIE* Steel tube Ø 48.3 mm, hot dip galvanized. Hook is welded at the inside of the tube for ideal connection of the couplers. |  | — | 0.18 | 0.95 | 009190 | 11.80 |
|  | ANCHOR BRIDGE WDVS Set with WDVS bridge and two eye bolts for the anchoring of scaffolding to house walls, especially for WDVS. Even with a lever arm of 28 cm a sufficient load capacity is guaranteed parallel to the house wall. | | — | — | 3.61 | 009141 | 71.80 |
| WDVS = Thermal insulation composite system | | | | | | | |
|  | EYE BOLT Galvanized and welded, Ø 12 mm, for expansion plug. | | 150 | 0.09 | 0.155 | 000358 | 1.10 |
| | | | 150 | 0.12 | 0.175 | 000359 | 1.20 |
| | | | 100 | 0.16 | 0.210 | 000360 | 1.30 |
| | | | 100 | 0.19 | 0.235 | 000363 | 1.40 |
| | | | 100 | 0.23 | 0.265 | 000361 | 1.50 |
| | | | 50 | 0.30 | 0.300 | 002374 | 1.65 |
| | | | 50 | 0.35 | 0.364 | 000362 | 1.95 |
|  | EXPANSION PLUG for eye bolts with a timber thread Ø 12 mm for drilling Ø 14 mm. | | 100 | 0.07 | 0.007 | 000357 | 0.25 |
|  | PLASTIC CAP for closing anchor drill holes. | nature | 100 | — | 0.003 | 000651 | 0.15 |
| | | black | 100 | — | 0.003 | 010353 | 0.15 |
|  | SECURITY PIN For securing the scaffold joints against unintentional lift-off, for example, when moving scaffold units with a crane or in special wind conditions, Ø 9 mm. | | — | — | 0.15 | 000508 | 0.95 |

*Approval procedure not yet completed

| | | Length m | Width m | Weight approx. kg | Article No. | Price Euro |
|--|---------------------|-------------|------------|----------------------|----------------|---------------|
|  <p>SCAFFOLD PALLET FOR VERTICAL FRAME Steel tube, hot-dip galvanised, continuous fork mount for safe fork-lift transport. Additional cut-outs allow side retracting. Load capacity 16 frames. PU: 5 pieces</p>  | UT | 1.12 | 0.74 | 28.30 | 008363 | 210.00 |
| | | | | | | |
|  <p>STACKING PALLET FOR TUBES Steel tube, hot-dip galvanized. Specially suited for module scaffolds, standards, ledgers, guard rails, diagonal braces, tubes and toe boards. Open all round, suited for stacked and crane transports. The tubular supports are removable and are to be stowed securely in the base frame so that empty pallets can be transported and stacked in a very space-saving manner. PU: 5 pieces</p>  | | 0.85 | 0.85 | 30.50 | 006962 | 152.00 |
| | | 1.25 | 0.55 | 31.80 | 010334 | 162.00 |
| | | 1.25 | 0.85 | 35.00 | 005614 | 167.00 |
|  <p>PALLET FOR TUBES Steel, hot-dip galvanized, robust model, cannot be dismantled, with crane lugs.</p> | | 1.10 | 0.60 | 39.90 | 007980 | 182.00 |
| | | | | | | |
|  <p>STACK PALETTE Steel, hot-dip galvanized. Can be combined with grid boxes and pickup for crane hook.</p> | | 1.20 | 0.80 | 42.00 | 010176 | 299.00 |
|  <p>INDUSTRIAL LATTICE BOX with wooden deck. On a side with half flap.</p> | Fill height 1000 mm | 1.00 | 0.800 | 85.00 | 002249 | 274.00 |
| | Fill height 400 mm | 1.24 | 0.835 | 85.00 | 009749 | 259.00 |
| | Fill height 330 mm | 1.24 | 0.835 | 85.00 | 009750 | 239.00 |
| PACKAGING TAPE painted with zinc dust, 0.5 x 16 mm (as a ring). | | — | — | 45.00 | 002228 | 165.00 |
| STRAPPING TOOL FOR PACKAGING TAPE | | — | — | — | 002428 | 1,530.00 |
| DISPENSER FOR STEEL STRIP | | — | — | — | 002429 | 422.50 |

New Model!
Special orders on request!
NEW



FALLSTOP SET SCAFFOLDING 1
including:

HARNESS
STRIPE BASIC CLICK LIGHT
with vain protection.

COMFORT SHOULDER PAD

BACK EYE EXTENSION TIE 50 m

FLEX SHOCK ABSORBER
elastic webbing with safety and tube hooks

DEVICE BAG size 3

Article
No.

Price
Euro

010611

249.00*



FALLSTOP SET SCAFFOLDING 2
including:

HARNESS
STRIPE BASIC CLICK LIGHT
with vain protection.

COMFORT SHOULDER PAD

BACK EYE EXTENSION TIE 50 m

SELF-WINDING BELT SHOCK ABSORBER
with belt tensioner RETRAK 2.00 m

DEVICE BAG size 4

010612









309.00*

EC-type examination certificate

For the safety system, there is an EC-type examination certificate issued by the German Social Accident Insurance (DGUV), expert committee PPE. Insurance Association for occupational health checks

*Net prices



| | | | Article No. | Price Euro |
|---|--|---------------|-------------|------------|
|  | HARNESS STRIPE BASIC CLICK Universal harness for all application situations. Special designed for needs of handcraft and scaffolding in accordance with EN 361. | | 009646 | 105.00* |
|  | FLEX STRETCH STOP SHOCK Elastic webbing with securing hooks and Pipe hook 2A / 501. | | 009648 | 98.00* |
|  | SHOULDERPAD COMFORT BLACK The shoulderpad protects against the friction of the shoulderstrape on the skin. It is fastened by a hook and loop fastener under the straps. | black | 009647 | 39.00* |
|  | BACK EYELET EXTENSION TIE Secure with the back eyelet of the safety harness this extension provides scaffolding builders extension when working on scaffolding. To secure an easy attaching of the safety device. With industrial license. | 50 cm | 009649 | 29.00* |
| | | 80 cm | 009650 | 36.00* |
|  | CARABINER HOOK HEART LIGHT With TL-Plus closure, ALU anodised. The special heart shape prevents the slippage of the Carabiner hook. Opening diameter: 22 mm. | | 009651 | 19.20* |
|  | HAMMER AND RATCHET CARRIER | left slanted | 009652 | 16.00* |
| | | right slanted | 009653 | 16.00* |
|  | BELT STORAGE BAG Bag for storage and transport of a safety harness with absorbing connecting Lanyard. Adjustable shoulder straps. Recommended load up to ca. 5 kg. Colour: black. | | 009741 | 46.00* |
|  | ANCHORAGE PROTECTION SET LORY Compact rescue set especially for scaffolding assembly. The lifting function makes it possible to rescue the fallen person and evacuate him/her to the next scaffolding level as well as a rescue abseiling downwards. | 30 m | 009655 | 484.00* |
| | | 50 m | 009656 | 484.00* |

*Net prices


SF PREMIUM SET "MILLER"
 including:

**SAFETY HARNESS
REVOLUTION R2 SCAF**

with front and back stopper loop, sharp-edge tested back loop extensions, quick adjustment, automatic closures, comfort back pads, belt-end clips, elastic duraflex belt band, swivel connection, EN 361.

FIXING MEANS
WITH STRAP FALL ATTENUATOR

Length 2.00 m, sharp-edge tested, horizontally approved (stopping point at base height), 63 mm scaffold hook, flexible design for added movement, safety clip to fasten safety harness, teflon-coated for longer service life, EN 354 and EN 355.

EQUIPMENT BAG

0.27 x 0.50 m (D x L), made of PVC, red.

| Article No. | Price Euro |
|-------------|----------------|
| S-M | 006273 249.00* |
| L-XL | 005610 249.00* |


WARN VEST NEON YELLOW

2 reflective strips surrounding (according to DIN). Regulation of the width by Velcro strips in front. Packed in a handy bag.

| | |
|--------|-------|
| 010607 | 9.90* |
|--------|-------|


SCAFFOLDING POUCH PREMIUM (L)


PVC-hard foil, DIN A5 high, with two metal eyes up / down and clear slot-in-sleeve for classification of the scaffold on site.

| | |
|--------|-------|
| 000653 | 2.90* |
|--------|-------|

SCAFFOLDING POUCH STANDARD (R)

PVC-soft foil, DIN A5 high, with a perforation up/down and clear slot-in-sleeve for classification of the scaffold on site.

| | |
|--------|-------|
| 009896 | 2.15* |
|--------|-------|


FORM BLOCK, DIN A4

Triple carbon copies, 25 records per block, for mounting the scaffold signs and classification of the scaffold on site.

| | |
|--------|-------|
| 000654 | 3.80* |
|--------|-------|

EXPERT TEST

of personal protective equipment according to BGG 906 (principle of the German Employers' Liability Insurance Association for occupational health checks).

| | |
|--------|--------|
| 007614 | 25.00* |
|--------|--------|



UVEX PROTECTIVE HELMET ALPINE
For height work and rescue
Tested and marked according to EN 397
(industrial protection helmets) and
EN 12492 (Mountaineering helmets).

| | Article No. | Price Euro |
|--------|-------------|------------|
| white | 009684 | 73.10* |
| red | 009685 | 73.10* |
| yellow | 009686 | 73.10* |
| orange | 009687 | 73.10* |
| green | 009688 | 73.10* |
| blue | 009689 | 73.10* |
| black | 009690 | 73.10* |




UVEX PROTECTIVE HELMET PHEOS S-KR
Tested and approved
According to EN 397 with 4-point chin straps
According to EN 397 pre assembled on the helmet.

| | | |
|--------|--------|--------|
| white | 009392 | 20.50* |
| black | 009393 | 20.50* |
| yellow | 009394 | 20.50* |
| blue | 009395 | 20.50* |



KASK INDUSTRIAL CLIMBING HELMET PLASMA Q
Tested and approved acc. EN 397.
With chin strap. Adjusting wheels allow one
quick and easy adjustment to the right size.
With ring for attaching the helmet to a belt.

| | | |
|------------|--------|--------|
| white | 010497 | 58.00* |
| yellow | 010498 | 58.00* |
| orange | 010499 | 58.00* |
| red | 010500 | 58.00* |
| green | 010501 | 58.00* |
| dark green | 010502 | 58.00* |
| royal blue | 010503 | 58.00* |
| black | 010453 | 58.00* |

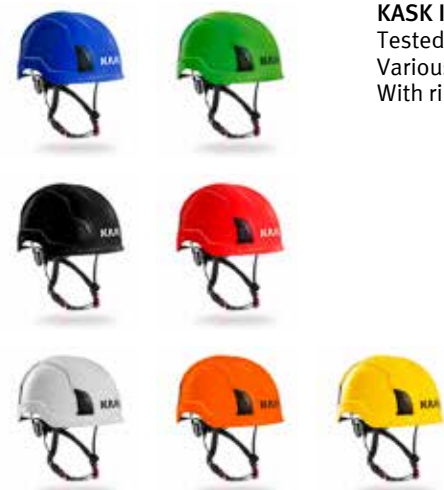

KASK INDUSTRIAL CLIMBING HELMET ZENITH
Tested and approved acc. EN 397 and EN 50365.
Various settings allow a quick and easy adjust.
With ring for attaching the helmet to a belt.

| | | |
|--------|--------|--------|
| blue | 010504 | 69.00* |
| white | 010505 | 69.00* |
| yellow | 010506 | 69.00* |
| orange | 010507 | 69.00* |
| red | 010508 | 69.00* |
| green | 010509 | 69.00* |
| black | 010510 | 69.00* |

Scaffold bay length 2.50 m

Scaffold length (m) x Working height (m)
Working surface

BASIC EQUIPMENT

| | Article No. | List price € | 100.00 x 10.20 1,020 m ² | 50.00 x 10.20 510 m ² | 30.00 x 10.20 306 m ² |
|-------------------------------------|-------------|-----------------|---|--|--|
| Vertical frame 2.00 x 0.65 m steel | 001019 | 71.90 | 164 | 84 | 52 |
| Timber deck 2.50 x 0.29 m | 001072 | 53.10 | 320 | 160 | 96 |
| Diagonal 2.50 m bay | 000080 | 27.00 | 32 | 16 | 12 |
| Single guard rail 3.00 m, twice | 000049 | 15.90 | 368 | 184 | 111 |
| Toe board 2.50 m | 001105 | 18.60 | 160 | 80 | 48 |
| Toe board 0.65 m | 001109 | 13.40 | 8 | 8 | 8 |
| Double end guard rail 0.65 m | 001036 | 24.50 | 6 | 6 | 6 |
| Guard rail post 0.65 m with transom | 001050 | 32.80 | 39 | 19 | 11 |
| Top end guard frame 0.65 m | 001046 | 55.20 | 2 | 2 | 2 |
| Starting transom 0.65 m | 001044 | 14.90 | 16 | 8 | 6 |
| Base jack 0.60 m | 000320 | 15.00 | 82 | 42 | 26 |
| Total price in € | – | – | 41,587.00 | 21,118.20 | 13,022.90 |
| Total weight in kg | – | – | 11,376.30 | 5,750.30 | 3,526.90 |
| Price per m² in € | – | | 40.77 | 41.41 | 42.56 |

ANCHORING

| | | | | | |
|---------------------------------------|--------|------|---------------|---------------|---------------|
| Wall tie 0.30 m | 000240 | 9.35 | 43 | 23 | 13 |
| Double coupler with collar nut A/F 22 | 000325 | 6.40 | 43 | 23 | 13 |
| Expansion plug | 000357 | 0.25 | 43 | 23 | 13 |
| Eye-bolt 12 x 120 mm | 000359 | 1.20 | 43 | 23 | 13 |
| Total price in € | – | – | 739.60 | 395.60 | 223.60 |
| Total weight in kg | – | – | 117.00 | 63.00 | 36.00 |

ADDITIONAL EQUIPMENT

| | | | | | |
|---|--------|--------|------------------|------------------|-----------------|
| Extra charge € aluminum access decks * | 003706 | 282.00 | | | |
| Total price in € | | | 703.20 | 703.20 | 703.20 |
| Extra charge € aluminum deck instead of wood | 001119 | 117.90 | | | |
| Total price in € | | | 20,736.00 | 10,368.00 | 6,220.80 |
| Extra charge € steel deck instead of wood | 001114 | 69.70 | | | |
| Total price in € | | | 5,312.00 | 2,656.00 | 1,593.60 |
| Extra charge € aluminum vertical frames instead of steel | 001035 | 105.60 | | | |
| Total price in € | | | 8,610.00 | 4,410.00 | 2,730.00 |

* when using 4 access-decks instead of 8 wooden decks.

Scaffold bay length 3.00 m

Scaffold length (m) x Working height (m)
Working surface

| | Article No. | List price € | 99.00 x 10.20 1,010 m ² | 51.00 x 10.20 520 m ² | 30.00 x 10.20 306 m ² |
|---|-------------|-----------------|--|--|--|
| BASIC EQUIPMENT | | | | | |
| Vertical frame 2.00 x 0.65 m steel | 001019 | 71.90 | 136 | 72 | 44 |
| Timber deck 3.00 x 0.29 m | 001071 | 59.20 | 264 | 136 | 80 |
| Diagonal 3.00 m bay | 000079 | 29.50 | 28 | 16 | 8 |
| Single guard rail 3.00 m, twice | 000048 | 16.90 | 304 | 157 | 92 |
| Toe board 3.00 m | 001104 | 20.60 | 132 | 68 | 40 |
| Toe board 0.65 m | 001109 | 13.40 | 8 | 8 | 8 |
| Double end guard rail 0.65 m | 001036 | 24.50 | 6 | 6 | 6 |
| Guard rail post 0.65 m with transom | 001050 | 32.80 | 32 | 16 | 9 |
| Top end guard frame 0.65 m | 001046 | 55.20 | 2 | 2 | 2 |
| Starting transom 0.65 m | 001044 | 14.90 | 14 | 8 | 4 |
| Base jack 0.60 m | 000320 | 15.00 | 68 | 36 | 22 |
| Total price in € | – | | 36,732.80 | 19,305.70 | 11,563.80 |
| Total weight in kg | – | | 11,243.00 | 5,893.00 | 3,487.00 |
| Price per m² in € | – | | 36.37 | 37.12 | 37.79 |
| ANCHORING | | | | | |
| Wall tie 0.30 m | 000240 | 9.35 | 43 | 23 | 13 |
| Double coupler with collar nut A/F 22 | 000325 | 6.40 | 43 | 23 | 13 |
| Expansion plug | 000357 | 0.25 | 43 | 23 | 13 |
| Eye-bolt 12 x 120 mm | 000359 | 1.20 | 43 | 23 | 13 |
| Total price in € | – | – | 739.60 | 395.60 | 223.60 |
| Total weight in kg | – | – | 117.00 | 63.00 | 36.00 |
| ADDITIONAL EQUIPMENT | | | | | |
| Extra charge € aluminum access decks * | 003707 | 315.00 | | | |
| Total price in € | | | 786.40 | 786.40 | 786.40 |
| Extra charge € aluminum deck instead of wood | 001120 | 132.20 | | | |
| Total price in € | | | 19,272.00 | 9,928.00 | 5,840.00 |
| Extra charge € steel deck instead of wood | 001115 | 80.00 | | | |
| Total price in € | | | 5,491.20 | 2,828.80 | 1,664.00 |
| Extra charge € aluminum vertical frames instead of steel | 001035 | 105.60 | | | |
| Total price in € | | | 6,310.40 | 3,340.80 | 2,041.60 |

* when using 4 access-decks instead of 8 wooden decks.



MJ-Gerüst GmbH

Ziegelstraße 68 | 58840 Plettenberg

Telephone: +49 2391 8105 350

info@mj-geruest.de | www.mj-geruest.de

Company:

Name of buyer

Customer no. (if applicable)

☐ Order ☐ Inquiry

| Product description | Article no. | Quantity | Unit price / € | Total value / € |
|---------------------|-------------|----------|----------------|-----------------|
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

All prices exclude VAT applicable at the time of shipment. All dimensions and weights are non-binding approximate values.
Technical data is subject to change without prior notice. Prices are charged as applicable on the day of shipment.
Sale is subject exclusively to our sales terms and delivery conditions. In brief: Place of business and jurisdiction is Plettenberg.
Extended reservation of property rights until full payment of all our outstanding accounts are received. Our prices are ex works.

Order value / €

Shipping address:

Date of delivery

Shipping method

Terms of delivery

Packaging costs

Other

Terms of payment

MJ consultant


Customer signature

Copy this form and fax to +49 2391 8105 375



MJ-GERÜST
Scaffolding Systems

Also in your vicinity

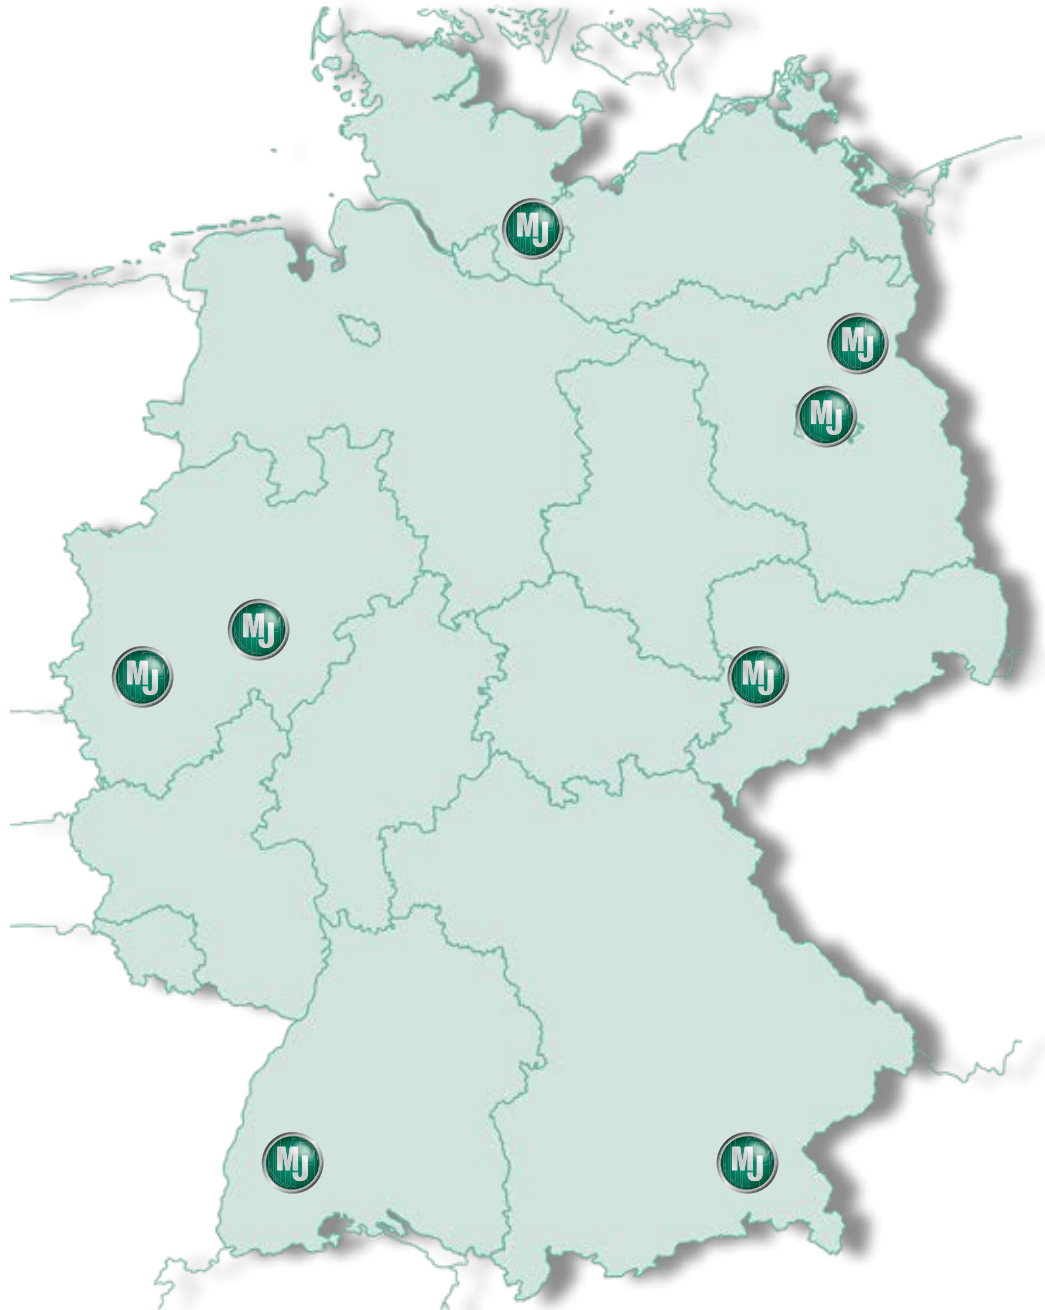

Head office / Production site

MJ-Gerüst GmbH
Ziegelstraße 68
58840 Plettenberg
Mon – Thu: 8:00 a.m. – 4:30 p.m.
Fri: 8:00 a.m. – 4:00 p.m.
Tel.: +49 2391 8105 350

MJ-Warehouse Burgenlandkreis
on the grounds of
Rainer Deike
Beuditzer Berg 4
06618 Naumburg - Meyhen
Mon – Fri: 8:00 a.m. – 5:00 p.m.
Tel.: +49 34466 20361

MJ-Warehouse Berlin
on the grounds of
Menke Gerüstbau GmbH
Roedernallee 9
13407 Berlin
Mon – Fri: 7:00 a.m. – 3:00 p.m.
Tel.: +49 30 4145631

MJ-Warehouse Kenzingen
on the grounds of
Himmelsbach Leitern- und Gerüstefabrik GmbH
Freiburger Straße 28
79341 Kenzingen
Mon – Thu: 8:00 a.m. – 5:30 p.m.
Fri: 8:00 a.m. – 4:00 p.m.
Tel.: +49 7644 91120

MJ-Warehouse Eberswalde
Poratzstraße
16225 Eberswalde
Nov – Feb: 7:30 a.m. – 3:30 p.m.
Mar – Oct: 7:00 a.m. – 4:00 p.m.
Tel.: +49 3334 589070

MJ-Warehouse Hamburg
on the grounds of
Richard Dubiec Gerüstbau GmbH
Liebigstraße 107
22113 Hamburg
Mon – Fri: 8:00 a.m. – 6:00 p.m.
Tel.: +49 40 218806

MJ-Warehouse Cologne
on the grounds of
Odendahl + Feldbusch GmbH
Robert-Bosch-Straße 53 - 55
50769 Cologne
Mon – Fri: 7:00 a.m. – 5:00 p.m.
Tel.: +49 221 9704190

MJ-Warehouse Ramerberg
on the grounds of
Sebastian Riedl Baugeräte/Schalung
Anger 1c
83561 Ramerberg
Mon – Fri: 5:30 a.m. – 5:00 p.m.
Tel.: +49 8039 409 360